



em eco|mate® Family



Our **ecomate® Family** of circular, multiway connectors provide an IP65 thru IP69K rating range (in mated condition), depending on the series, for indoor/outdoor industrial applications and feature robust, durable, plastic or metal construction with either a circular bayonet, a quick-locking automatic, or a rapid coupling system option. With an amperage/voltage range of 5A-300A/250V-1000V, depending on the series, our ecomate® Family of products are perfect for a wide range of Factory Automation, Industrial, Heavy Equipment, Heavy Duty, Transportation, and Entertainment/Lighting markets.

	ecomate® Aquarius™	ecomate® Aquarius™PCB Mounts	ecomate® Aquarius™Fathom Lock	ecomate® RM	ecomate® RSSM	ecomate® RM High Amp	ecomate® Plastic	ecomate® C16-3/C16-L
IP Rating (in mated condition)								
Shell Sizes/ Inserts	6 Shell Sizes, 34 Inserts	6 Shell Sizes, 18 Inserts	3 Shell Sizes, 17 Inserts	8 Shell Sizes, 32 Inserts	8 Shell Sizes, 28 Inserts	4 Shell Sizes, 5 Inserts	1 Shell Size, 4 Inserts	2 Shell Sizes, 11 Inserts
Unique Feature	Mixed Power and Signal Layouts	PCB Mounted Jam Nut Receptacles	Auto-Locking, Fathom Lock	Rugged Metal	Rugged Metal w Superior Seals (+125°C)	RADSOK® Contacts	Circular Thermoplastic	Circular Thermoplastic
Max. Current Amp/Volt	Up to 65A/1000V	Up to 13A/600V	Up to 45A/600V	Up to 45A/600V	Up to 45A/600V	Up to 300A/630V	Up to 22A/600V	Up to 50A/900V
Operating Temp Range	-40°C to +125°C	-40°C to +125°C	-40°C to +125°C	-40°C to +125°C	-40°C to +125°C	-40°C to +125°C	-40°C to +125°C	-40°C to +125°C
Coupling System	Circular Bayonet	Circular Bayonet	Auto-Locking	Circular Bayonet	Circular Bayonet	Circular Bayonet	Rapid Threading	Circular Bayonet
Housing Body	Thermoplastic UL94-VO	Thermoplastic UL94-VO	Thermoplastic UL94-VO	Body-Zinc Alloy; Coupling-Nickel Alum.	Body-Zinc Alloy; Coupling-Nickel Alum.	Body-Zinc Alloy; Coupling-Nickel Alum.	Thermoplastic UL94-VO	Thermoplastic UL94-VO
Contact Types	Note: Contacts are available in Machined or PCB (loose piece/bagged), or Stamped & Formed (reels) options and can be shared with the ecomate® Aquarius™, Aquarius™ Fathom Lock, RM and RSSM series.					RADSOK®	Stamped & Formed, Machined, Solder	Stamped & Formed
	Machined, Stamped & Formed, PCB	Machined, PCB	Machined, Stamped & Formed, PCB	Machined, Stamped & Formed, PCB	Machined, Stamped & Formed, PCB			
Wire AWG Range	30 - 8AWG (0.05 - 10.0 mm²)	20 - 12AWG (0.5 - 2.5 mm²)	30 - 8AWG (0.05 - 10.0 mm²)	30 - 8AWG (0.05 - 10.0 mm²)	30 - 8AWG (0.05 - 10.0 mm²)	8 - 3/0AWG (10 - 95mm²)	26 - 14AWG (0.14 - 2.5mm²)	28 - 10AWG (0.09 - 6.0 mm²)
Contact Termination	Crimp, Solder	Crimp, Solder	Crimp, Solder	Crimp, Solder	Crimp, Solder	Crimp, Flat Tail, Screw Tail	Screw (Field Install), Crimp, Solder	Screw (Field Install), Crimp
Sealing Material	NBR/Silicone Rubber	NBR/Silicone Rubber	Silicone Rubber	NBR/Silicone Rubber	NBR/Silicone Rubber	Silicone Rubber	Neoprene	Neoprene
Mating Cycles	>500	>500	>500	>500	>500	>500	>500	>500
Shielding	None	None	None	EMI/RMI Available	EMI/RMI Available	EMI/RMI Available	None	None
Flammability Rating	UL 94 V-0	UL 94 V-0	UL 94 V-0	UL 94 V-0	UL 94 V-0	UL 94 V-0	UL 94 V-0	UL 94 V-0
Fluid Resistance	Gas, oil, mineral oil, acid bath, basic bath	Gas, oil, mineral oil, acid bath, basic bath	Gas, oil, mineral oil, acid bath, basic bath	Gas, oil, mineral oil, acid bath, basic bath	Gas, oil, mineral oil, acid bath, basic bath	Gas, oil, mineral oil, acid bath, basic bath	Gas, oil, mineral oil, acid bath, basic bath	Gas, oil, mineral oil, acid bath, basic bath
Insulation Resistance	5000 MΩ	5000 MΩ	5000 MΩ	5000 MΩ	5000 MΩ	5000 MΩ	≥ 10⁸ Ω	≥ 10⁸ Ω
Approvals	UL ECBT2	UL ECBT2	UL ECBT2	UL ECBT2 & UL ECBT8	UL ECBT2 & UL ECBT8	UL ECBT2 & UL ECBT8	VDE, SEV, UL, CSA	VDE, UL and CSA
RoHS Compliant	RoHS ALL materials meet the requirements of the European Directive. (See website for documentation)							



Standard products. Custom solutions
Customer Service +1 800 394 7732



em eco|mate® AQUARIUS™

Circular, Plastic, Waterproof Connectors for Indoor/Outdoor Applications



Available in 6 Shell Sizes and 34 Insert Arrangements for Power, Mixed Power/Signal, Coax and RJ45 layouts.

Amphenol Sine Systems' **ecomate® Aquarius™ Series** of waterproof connectors provide an IP67 and IP69K rating (in mated condition) for industrial applications, and incorporates the latest technology in a high-impact, thermoplastic design, offering advantages of lightweight, lower-cost, sealed connector systems on the market today. ecomate® Aquarius™ connectors are ideal for Indoor/Outdoor applications and the MIL-DTL-26482 based design provides a quick, reliable, 1/3 turn bayonet coupling.

Contacts are available in Machined or PCB (loose piece/bagged), or Stamped & Formed (reels) options and can be shared with the ecomate® Aquarius™ Fathom Lock, RM, and RSSM series.

Key Features

- IP67 and IP69K rated (in mated condition)
- Circular Bayonet Coupling System
- Power, Mixed Power/Signal, Coax and RJ45 Layouts
- Machined, Stamped & Formed, and PCB Contacts
- Lightweight, High-Strength, Impact Resistant
- MIL-DTL-26482-based Design
- UV/Corrosion Resistant: Salt Spray Test 500 hours
- Colored Rings for Visual Identification Available
- Kits Available



Potential Applications: Solar Energy – Power; Off-Road – Mining, Railway, Marine; Instrumentation – Measurement, Water Metering; Building Automation - HVAC, Lighting, Closed Circuit TV; Telecom – Data Infrastructure, Traffic Control

ecomate® Aquarius™ - Specifications (Reference Individual Datasheets)

IP Rating	IP67 and IP69K (in mated condition)	Shielding	None
Max. Current Amperage	Up to 65A	Flammability Rating	UL 94 V-0
Max. Voltage Rating (AC/DC)	1000V	Fluid Resistance	Gas, oil, mineral oil, acid bath, basic bath
Operating Temperature	-40°C to +125°C	Test Voltage Rating	1500V/2000V
Coupling System	Circular Bayonet	Overvoltage Category	III
Housing Body	Thermoplastic UL94-VO	Strain Relief Clamp Range	1.5 - 14.0mm
Contact Types	Machined, Stamped & Formed, PCB	Insulation Resistance	5000 megohms
Contact Termination	Crimp, Solder	Thermal Shock	No cracking, chipping or leaking after 20 test cycles from -55°C to 125°C
Contact Material	Copper Alloy (Gold, Tin & Silver Plating are available)	RoHS Compliant	RoHS ALL materials meet the requirements of the European Directive. (See website for documentation)
Wire AWG Range	30 - 8AWG (0.05 - 10.0 mm ²)	Approvals	UL ECBT2
Sealing Material	NBR/Silicone Rubber		
Min. Mating Cycles	>500		

Connector Configurations



Standard products. Custom solutions
Customer Service +1 800 394 7732

Contact Legend (Size (mm²) Amperage)

Size 20 (0.5mm ²) 7.5A	Size 16 (1.5mm ²) 13A	Coax RG316/U 1.5A	Size 12 (2.5mm ²) 23A	Size 8 (3.6mm ²) 56A	Size 8* (3.6mm ²) 65A

Recommended Wire Insulation Overall Diameter (OD) for End Caps

Contact Size	Typical Wire Range	(N) Normal Wire Seal	(R) Reduced Wire Seal
20	20-30AWG (0.50-0.05mm ²)	1.6-2.6mm (0.063-0.102 in)	1.2mm-1.6mm (0.047-0.063 in)
16	14-24AWG (2.5-0.14mm ²)	2.0-3.2mm (0.079-0.126 in)	1.2mm-2.1mm (0.047-.083 in)
12	12-14AWG (3.5-2.5mm ²)	3.3-4.3mm (0.130-0.169 in)	-
8	10-12AWG (16.0-10.0mm ²)	2.8-5.8mm (0.110-0.228 in)	-
8*	8-16AWG (10.0-1.5mm ²)	2.8-4.1mm (0.110-0.161 in)	-

NOTE: * Applies to 14-3, 18-2 and 18-4 insert arrangement only. See chart below.

ecomate® Aquarius™ - Shell Sizes & Insert Arrangements
(Front view of pin insert/rear view of socket insert shown for reference only)

Shell Size 8	Shell Size 8	Shell Size 10	Shell Size 10	Shell Size 10	Shell Size 10	Shell Size 10	Shell Size 10	Shell Size 12	Shell Size 12	Shell Size 12
08-03 3 x Size 20 (0.5mm ²) 7.5A/250V	08-04 4 x Size 20 (0.5mm ²) 7.5A/250V	10-03 3 x Size 16 (1.5mm ²) 13A/500V	10-04 4 x Size 16 (1.5mm ²) 13A/500V (N)	10-04 (2+2) MIX 2 x Size 16 (1.5mm ²) 13A 2 x Size 20 (0.5mm ²) 7.5A 500V (N)	10-06 6 x Size 20 (0.5mm ²) 7.5A/250V (N)	10-06 (3+3) MIX 3 x Size 16 (1.5mm ²) 13A 3 x Size 20 (0.5mm ²) 7.5A 500V	12-03 3 x Size 16 (1.5mm ²) 13A/600V (N)	12-04 4 x Size 16 (1.5mm ²) 13A/500V (N) (R)	12-04 (2+2) MIX 2 x Size 12 (2.5mm ²) 23A 2 x Size 20 (0.5mm ²) 7.5A 500V (N)	12-04 (2+2) MIX 2 x Size 12 (2.5mm ²) 23A 2 x Size 20 (0.5mm ²) 7.5A 500V (N)







Shell Size 12	Shell Size 12	Shell Size 14	Shell Size 14	Shell Size 14	Shell Size 14	Shell Size 14	Shell Size 14	Shell Size 14	Shell Size 14	Shell Size 14
12-08 8 x Size 16 (1.5mm ²) 13A/500V (N) (R)	12-10 10 x Size 20 (0.5mm ²) 7.5A/250V (N)	14-03 3 x Size 8* (3.6mm ²) 45A/600V (N)	14-04 4 x Size 12 (2.5mm ²) 23A/500V (N)	14-04 (2+2) MIX 2 x Size 12 (2.5mm ²) 23A 2 x Size 16 (1.5mm ²) 13A 500V (N)	14-07 7 x Size 16 (1.5mm ²) 13A/500V (N) (R)	14-07 (3+4) MIX 3 x Size 12 (2.5mm ²) 23A 4 x Size 16 (1.5mm ²) 13A 500V	14-08 8 x Size 16 (1.5mm ²) 13A/500V (N)	14-12 12 x Size 16 (1.5mm ²) 13A/500V (N) (R)	14-12 (8+4) MIX 8 x Size 20 (0.5mm ²) 7.5A 4 x Size 16 (1.5mm ²) 13A 500V (N)	14-12 (8+4) MIX 8 x Size 20 (0.5mm ²) 7.5A 4 x Size 16 (1.5mm ²) 13A 500V (N)

Shell Size 14	Shell Size 14	Shell Size 16	Shell Size 16	Shell Size 16	Shell Size 16	Shell Size 16	Shell Size 16	Shell Size 18	Shell Size 18	Shell Size 18
14-15 (1+1) MIX 14 x Size 20 (0.5mm ²) 7.5A 1 x Size 16 (1.5mm ²) 13A 500V (N)	14-19 19 x Size 20 (0.5mm ²) 7.5A/250V (N)	16-04 4 x Size 8 (3.6mm ²) 45A/600V (N)	16-09 (4+5) MIX 4 x Size 12 (2.5mm ²) 23A 5 x Size 16 (1.5mm ²) 13A 500V (N)	16-13 (3+10) MIX 3 x Size 12 (2.5mm ²) 20A 10 x Size 20 (0.5mm ²) 5A 500V (N)	16-19 19 x Size 16 (1.5mm ²) 13A/500V (N)	16-26 26 x Size 20 (0.5mm ²) 7.5A/250V (N)	18-02 2 x Size 8* (3.6mm ²) 65A/1000V (N)	18-04 4 x Size 8* (3.6mm ²) 65A/1000V (N)	18-08 8 x Size 12 (2.5mm ²) 23A/500V (N)	18-08 8 x Size 12 (2.5mm ²) 23A/500V (N)

Shell Size 18	Shell Size 18	Shell Size 18	Shell Size 18
18-13 (10+3) MIX 10 x Size 20 (0.5mm ²) 7.5A 3 x Coax 1.5A, RG316/U 500V	18-23 23 x Size 16 (1.5mm ²) 13A/500V (N) (R)	18-32 32 x Size 20 (0.5mm ²) 7.5A/250V (N)	18-08 Pos R145 CatSe 1.5A/125V

Backshell Cable Diameters	
Shell Size 8	1.5 - 6.5mm
Shell Size 10	4.0 - 8.8mm
Shell Size 12	6.0 - 12.0mm
Shell Size 14	6.0 - 14.0mm
Shell Size 16	10.0 - 17.0mm
Shell Size 18	10.0 - 18.0mm

ecomate® Aquarius™ - Accessories

Image	Part Number	Description
	RTS0L-8CG	Shell Size 8, Cord Grip - Long, ecomate® Aquarius™, Cable OD Range 1.5-6.5mm, Thermoplastic, Black Body
	RTS0L-10CG	Shell Size 10, Cord Grip - Long, ecomate® Aquarius™, Cable OD Range 4.0-8.8mm, Thermoplastic, Black Body
	RTS0L-12CG	Shell Size 12, Cord Grip - Long, ecomate® Aquarius™, Cable OD Range 6.0-12.0mm, Thermoplastic, Black Body
	RTS0L-16CG	Shell Size 16, Cord Grip - Long, ecomate® Aquarius™, Cable OD Range 10.0-17.0mm, Thermoplastic, Black Body
	RTS0L-18CG	Shell Size 18, Cord Grip - Long, ecomate® Aquarius™, Cable OD Range 10.0-18.0mm, Thermoplastic, Black Body
	RTS0L-18CG-S3	Shell Size 18, Cord Grip - Long, ecomate® Aquarius™, Cable OD Range 5.0-8.5mm, Thermoplastic, Black Body
	RTS8CCRG	Shell Size 8, Coding Color Ring, ecomate® Aquarius™, Thermoplastic, Green Body
	RTS8CCRR	Shell Size 8, Coding Color Ring, ecomate® Aquarius™, Thermoplastic, Red Body
	RTS8CCRY	Shell Size 8, Coding Color Ring, ecomate® Aquarius™, Thermoplastic, Yellow Body
	RTS10CCRG	Shell Size 10, Coding Color Ring, ecomate® Aquarius™/ecomate® Aquarius™ Fathom Lock, Thermoplastic, Green Body
	RTS10CCRR	Shell Size 10, Coding Color Ring, ecomate® Aquarius™/ecomate® Aquarius™ Fathom Lock, Thermoplastic, Red Body
	RTS10CCRY	Shell Size 10, Coding Color Ring, ecomate® Aquarius™/ecomate® Aquarius™ Fathom Lock, Thermoplastic, Yellow Body
	RTS12CCRG	Shell Size 12, Coding Color Ring, ecomate® Aquarius™/ecomate® Aquarius™ Fathom Lock, Thermoplastic, Green Body
	RTS12CCRR	Shell Size 12, Coding Color Ring, ecomate® Aquarius™/ecomate® Aquarius™ Fathom Lock, Thermoplastic, Red Body
	RTS12CCRY	Shell Size 12, Coding Color Ring, ecomate® Aquarius™/ecomate® Aquarius™ Fathom Lock, Thermoplastic, Yellow Body
	RTS14CCRG	Shell Size 14, Coding Color Ring, ecomate® Aquarius™/ecomate® Aquarius™ Fathom Lock, Thermoplastic, Green Body
	RTS14CCRR	Shell Size 14, Coding Color Ring, ecomate® Aquarius™/ecomate® Aquarius™ Fathom Lock, Thermoplastic, Red Body
	RTS14CCRY	Shell Size 14, Coding Color Ring, ecomate® Aquarius™/ecomate® Aquarius™ Fathom Lock, Thermoplastic, Yellow Body
	RTS16CCRG	Shell Size 16, Coding Color Ring, ecomate® Aquarius™, Thermoplastic, Green Body
	RTS16CCRR	Shell Size 16, Coding Color Ring, ecomate® Aquarius™, Thermoplastic, Red Body
	RTS16CCRY	Shell Size 16, Coding Color Ring, ecomate® Aquarius™, Thermoplastic, Yellow Body
RTS18CCRG	Shell Size 18, Coding Color Ring, ecomate® Aquarius™, Thermoplastic, Green Body	
RTS18CCRR	Shell Size 18, Coding Color Ring, ecomate® Aquarius™, Thermoplastic, Red Body	
RTS18CCRY	Shell Size 18, Coding Color Ring, ecomate® Aquarius™, Thermoplastic, Yellow Body	
	20-80646	Shell Size 18, Contact Alignment Collar, ecomate® Aquarius™, Thermoplastic, Black Body
	RTS610NDCG	Shell Size 10, Dust Cap for Plug, ecomate® Aquarius™, Thermoplastic, Black Body
	RTS612NDCG	Shell Size 12, Dust Cap for Plug, ecomate® Aquarius™, Thermoplastic, Black Body
	RTS614NDCG	Shell Size 14, Dust Cap for Plug, ecomate® Aquarius™, Thermoplastic, Black Body
	RTS616NDCG	Shell Size 16, Dust Cap for Plug, ecomate® Aquarius™, Thermoplastic, Black Body
	RTS618NDCG	Shell Size 18, Dust Cap for Plug, ecomate® Aquarius™, Thermoplastic, Black Body
	RTS010DCG	Shell Size 10, Dust Cap for Receptacle, ecomate® Aquarius™, Thermoplastic, Black Body
	RTS012DCG	Shell Size 12, Dust Cap for Receptacle, ecomate® Aquarius™, Thermoplastic, Black Body
	RTS014DCG	Shell Size 14, Dust Cap for Receptacle, ecomate® Aquarius™, Thermoplastic, Black Body
	RTS016DCG	Shell Size 16, Dust Cap for Receptacle, ecomate® Aquarius™, Thermoplastic, Black Body
	RTS018DCG	Shell Size 18, Dust Cap for Receptacle, ecomate® Aquarius™, Thermoplastic, Black Body
	RTFD08B	Shell Size 8, Gasket for Square Flange Receptacle, ecomate® Aquarius™, EPDM, Black Body
	RTFD10B	Shell Size 10, Gasket for Square Flange Receptacle, ecomate® Aquarius™, EPDM, Black Body
	RTFD12B	Shell Size 12, Gasket for Square Flange Receptacle, ecomate® Aquarius™, EPDM, Black Body
	RTFD14B	Shell Size 14, Gasket for Square Flange Receptacle, ecomate® Aquarius™, EPDM, Black Body
	RTFD16B	Shell Size 16, Gasket for Square Flange Receptacle, ecomate® Aquarius™, EPDM, Black Body
	RTFD18B	Shell Size 18, Gasket for Square Flange Receptacle, ecomate® Aquarius™, EPDM, Black Body
	RTFD24B	Shell Size 24, Gasket for Square Flange Receptacle, ecomate® Aquarius™, EPDM, Black Body



em eco|mate® AQUARIUS™

PCB Mounted, Jam Nut, Waterproof Receptacles for Indoor/Outdoor Applications



Available in 6 Shell Sizes and 18 Insert Arrangements

Amphenol Sine Systems' **ecomate® Aquarius™ PCB Mounted Jam Nut Waterproof Receptacles** are designed specifically for mounting to Printed Circuit Boards (PCB) or Flex Circuits. As part of the **ecomate® Aquarius Waterproof Connector** series, they provide an IP67/69K waterproof rating (in mated condition) for industrial applications, and incorporates the latest technology in high-impact thermoplastic design, offering advantages of lightweight, lower-cost, sealed connector systems on the market today. **ecomate® Aquarius Waterproof Connectors** are ideal for Indoor/Outdoor applications and the MIL-DTL-26482 based design provides a quick, reliable, circular bayonet coupling system.

Key Features

- **Built-In Stand-Off's** for consistent height off PCB for ease of cleaning
- **Optional Locking Posts** for secure mounting for harsh environments
- **Lower Profile** than industry standard Jam Nut receptacles
- IP67 and IP69K rated (in mated condition)
- Circular Bayonet Coupling System
- Colored Rings for Visual Identification Available



Applications: Solar Energy – Power; Off-Road – Mining, Railway, Marine; Instrumentation – Measurement, Water Metering; Building Automation - HVAC, Lighting, Closed Circuit TV; Telecom – Data Infrastructure, Traffic Control

ecomate® Aquarius™ PCB Mounted Jam Nut Receptacles - Specifications
(Reference Individual Datasheets)

IP Rating	IP67 and IP69K (in mated condition)
Max. Current Amperage	Up to 13A
Max. Voltage Rating (AC/DC)	600V
Operating Temperature	-40°C to +125°C
Coupling System	Circular Bayonet
Housing Body	Thermoplastic UL94-VO
Contact Types	Machined, PCB
Jam Nut Material	Aluminum Alloy, Black Anodizing
Locking Posts	Copper Alloy, Tin-Plated
Contact Termination	Crimp, Solder
Contact Material	Copper Alloy, Gold-Plated (See datasheets)
Wire AWG Range	20 - 12AWG (0.5 - 2.5 mm²)
Sealing Material	NBR/Silicone Rubber

Min. Mating Cycles	>500
Shielding	None
Flammability Rating	UL 94 V-0
Fluid Resistance	Gas, oil, mineral oil, acid bath, basic bath
Test Voltage Rating	1500V/2000V
Overvoltage Category	III
Strain Relief Clamp Range	1.5 - 14.0mm
Insulation Resistance	5000 megohms
Thermal Shock	No cracking, chipping or leaking after 20 test cycles from -55°C to 125°C
RoHS Compliant	RoHS ALL materials meet the requirements of the European Directive. (See website for documentation)
Approvals	UL ECBT2



Standard products. Custom solutions
Customer Service +1 800 394 7732


Contact Legend (Size (mm²) Amperage)

Size 20 (0.5mm ²) 7.5A	Size 16 (1.5mm ²) 13A	Size 12 (2.5mm ²) 23A

ecomate® Aquarius™ PCB Mounted Jam Nut Receptacles - Shell Sizes & Insert Arrangements
(Front view of pin insert/rear view of socket insert shown for reference only)


Shell Size 8 08-03 3 x Size 20 (0.5mm ²) 7.5A/250V	Shell Size 8 08-04 4 x Size 20 (0.5mm ²) 7.5A/250V	Shell Size 10 10-03 3 x Size 16 (1.5mm ²) 13A/500V	Shell Size 10 10-04 4 x Size 16 (1.5mm ²) 13A/500V (N)	Shell Size 10 10-04 (2+2) MIX 2 x Size 16 (1.5mm ²) 13A 2 x Size 20 (0.5mm ²) 7.5A 500V (N)	Shell Size 10 10-06 6 x Size 20 (0.5mm ²) 7.5A/250V (N)	Shell Size 12 12-03 3 x Size 16 (1.5mm ²) 13A/600V (N)	Shell Size 12 12-04 4 x Size 16 (1.5mm ²) 13A/500V (N) (R)	Shell Size 12 12-08 8 x Size 16 (1.5mm ²) 13A/500V (N) (R)	Shell Size 12 12-10 10 x Size 20 (0.5mm ²) 7.5A/250V (N)
Shell Size 14 14-07 7 x Size 16 (1.5mm ²) 13A/500V (N) (R)	Shell Size 14 14-08 8 x Size 16 (1.5mm ²) 13A/500V (N)	Shell Size 14 14-12 12 x Size 16 (1.5mm ²) 13A/500V (N) (R)	Shell Size 14 14-19 19 x Size 20 (0.5mm ²) 7.5A/250V (N)	Shell Size 16 16-19 19 x Size 16 (1.5mm ²) 13A/500V (N)	Shell Size 16 16-26 26 x Size 20 (0.5mm ²) 7.5A/250V (N)	Shell Size 18 18-23 23 x Size 16 (1.5mm ²) 13A/500V (N) (R)	Shell Size 18 18-32 32 x Size 20 (0.5mm ²) 7.5A/250V (N)		

PCB Mounted Jam Nut Receptacles w Locking Posts - Dimensions (in mm)

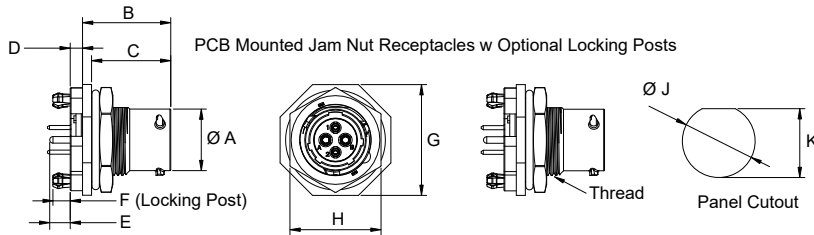

Size	Ø A	B	C	D	E	F	G	H	Thread	Ø J	K
08	11.9	21.7	19.5	2.9	5.0	4.1	24.0	19.1	9/16 - 24 UNEF	14.6	13.8
10	15.0	21.5	19.3	3.0	5.0	4.1	27.0	22.2	11/16 - 24-2A UNEF	17.8	16.8
12	19.0	21.5	19.3	3.0	5.0	4.1	27.0	31.7	7/8 - 20 UNEF	22.5	21.2
14	22.2	21.5	19.3	3.0	5.0	4.1	35.0	30.2	1 - 20 UNEF	25.6	24.2
16	25.3	21.5	19.3	3.0	5.0	4.1	38.1	33.3	1 1/8 - 18 UNEF	28.9	27.6
18	28.6	21.5	19.3	3.0	5.0	4.1	41.3	36.5	1 1/4 - 18 UNEF	32.1	30.6

ecomate® Aquarius™ PCB Receptacles - Accessories

Image	Part Number	Description
	RTS8CCRG	Shell Size 8, Coding Color Ring, ecomate® Aquarius™, Thermoplastic, Green Body
	RTS8CCRR	Shell Size 8, Coding Color Ring, ecomate® Aquarius™, Thermoplastic, Red Body
	RTS8CCRY	Shell Size 8, Coding Color Ring, ecomate® Aquarius™, Thermoplastic, Yellow Body
	RTS10CCRG	Shell Size 10, Coding Color Ring, ecomate® Aquarius™/ecomate® Aquarius™ Fathom Lock, Thermoplastic, Green Body
	RTS10CCRR	Shell Size 10, Coding Color Ring, ecomate® Aquarius™/ecomate® Aquarius™ Fathom Lock, Thermoplastic, Red Body
	RTS10CCRY	Shell Size 10, Coding Color Ring, ecomate® Aquarius™/ecomate® Aquarius™ Fathom Lock, Thermoplastic, Yellow Body
	RTS12CCRG	Shell Size 12, Coding Color Ring, ecomate® Aquarius™/ecomate® Aquarius™ Fathom Lock, Thermoplastic, Green Body
	RTS12CCRR	Shell Size 12, Coding Color Ring, ecomate® Aquarius™/ecomate® Aquarius™ Fathom Lock, Thermoplastic, Red Body
	RTS12CCRY	Shell Size 12, Coding Color Ring, ecomate® Aquarius™/ecomate® Aquarius™ Fathom Lock, Thermoplastic, Yellow Body
	RTS14CCRG	Shell Size 14, Coding Color Ring, ecomate® Aquarius™/ecomate® Aquarius™ Fathom Lock, Thermoplastic, Green Body
	RTS14CCRR	Shell Size 14, Coding Color Ring, ecomate® Aquarius™/ecomate® Aquarius™ Fathom Lock, Thermoplastic, Red Body
	RTS14CCRY	Shell Size 14, Coding Color Ring, ecomate® Aquarius™/ecomate® Aquarius™ Fathom Lock, Thermoplastic, Yellow Body
	RTS16CCRG	Shell Size 16, Coding Color Ring, ecomate® Aquarius™, Thermoplastic, Green Body
	RTS16CCRR	Shell Size 16, Coding Color Ring, ecomate® Aquarius™, Thermoplastic, Red Body
	RTS16CCRY	Shell Size 16, Coding Color Ring, ecomate® Aquarius™, Thermoplastic, Yellow Body
	RTS18CCRG	Shell Size 18, Coding Color Ring, ecomate® Aquarius™, Thermoplastic, Green Body
	RTS18CCRR	Shell Size 18, Coding Color Ring, ecomate® Aquarius™, Thermoplastic, Red Body
	RTS18CCRY	Shell Size 18, Coding Color Ring, ecomate® Aquarius™, Thermoplastic, Yellow Body



em eco|mate® AQUARIUS™ FATHOM LOCK

Circular, Plastic, Waterproof Connectors for Indoor/Outdoor Applications featuring our **Auto-Locking, Fathom Lock Coupling System**



Available in 3 Shell Sizes and 17 Insert Arrangements

Amphenol Sine Systems' **ecomate® Aquarius™ Fathom Lock Series** of waterproof connectors provide **an increased IP68 rating (1.8M of water for 1 Hour, in mated condition)** over our standard ecomate® Aquarius™ series, with the addition of the auto-locking, Fathom Lock Coupling System. This system offers significant time savings while ensuring an easy mating/unmating process of the plug to receptacle, verified by the tactile and audible clicking sound of the locking mechanism. To unmate, a simple 20° twist of the coupling ring on the plug will separate it from the receptacle.

Contacts are available in Machined or PCB (loose piece/bagged), or Stamped & Formed (reels) options and can be shared with the ecomate® Aquarius™, RM, and RSSM series.

Key Features

- IP68 and IP69K rated (in mated condition)
- Auto-Locking, Fathom Lock Coupling System
- Machined, Stamped & Formed, and PCB Contacts
- Lightweight, High-Strength, Impact Resistant
- UV/Corrosion Resistant: Salt Spray Test 500 hours
- Colored Rings for Visual Identification Available



Potential Applications: Solar Energy – Power; Off-Road – Mining, Railway, Marine; Instrumentation – Measurement, Water Metering; Building Automation - HVAC, Lighting, Closed Circuit TV; Telecom – Data Infrastructure, Traffic Control

How Our Auto-Locking, Fathom Lock Coupling System Works

Step 1

To mate the plug and receptacle together, ensure the arrows are aligned to each other.



Step 2

Push the plug onto the receptacle until the coupling ring automatically locks into place around the receptacle, as confirmed by both an audible click and tactile feel.



Step 3

To unmate the connection, the coupling ring on the plug must be rotated counter-clockwise 20°, at which point the plug can be removed.



Standard products. Custom solutions
Customer Service +1 800 394 7732

ecomate® Aquarius™ Fathom Lock - Specifications (Reference Individual Datasheets)

IP Rating	IP68 and IP69K (in mated condition)
Max. Current Amperage	Up to 45A
Max. Voltage Rating (AC/DC)	600V
Operating Temperature	-40°C to +125°C
Coupling System	Auto-Locking, Fathom Lock
Housing Body	Thermoplastic UL94-VO
Contact Types	Machined, Stamped & Formed, PCB
Contact Termination	Crimp, Solder
Contact Material	Copper Alloy (Gold, Tin & Silver Plating are available)
Wire AWG Range	30 - 8AWG (0.05 - 10.0 mm ²)
Sealing Material	Silicone Rubber
Min. Mating Cycles	>500
Shielding	None

Flammability Rating	UL 94 V-0
Fluid Resistance	Gas, oil, mineral oil, acid bath, basic bath
Test Voltage Rating	1500V/2000V
Overvoltage Category	III
Strain Relief Clamp Range	4.0 - 14.0mm
Insulation Resistance	5000 megohms
Thermal Shock	No cracking, chipping or leaking after 20 test cycles from -55°C to 125°C
RoHS Compliant	RoHS ALL materials meet the requirements of the European Directive. (See website for documentation)
Approvals	UL ECBT2

Contact Legend (Size (mm²) Amperage)

Size 20 (0.5mm ²) 7.5A	Size 16 (1.5mm ²) 13A	Size 12 (2.5mm ²) 23A	Size 8 (3.6mm ²) 45A

Recommended Wire Insulation Overall Diameter (OD) for End Caps

Contact Size	Typical Wire Range	(N) Normal Wire Seal	(R) Reduced Wire Seal
20	20-30AWG (0.50-0.05mm ²)	1.6-2.6mm (0.063-0.102 in)	1.2mm-1.6mm (0.047-0.063 in)
16	14-24AWG (2.5-0.14mm ²)	2.0-3.2mm (0.079-0.126 in)	1.2mm-2.1mm (0.047-.083 in)
12	12-14AWG (3.5-2.5mm ²)	3.3-4.3mm (0.130-0.169 in)	-
8	10-12AWG (16.0-10.0mm ²)	2.8-5.8mm (0.110-0.228 in)	-
8*	8-16AWG (10.0-1.5mm ²)	2.8-4.1mm (0.110-0.161 in)	-

NOTE: * Applies to 14-3 insert arrangement only. See chart below.

ecomate® Aquarius™ Fathom Lock - Shell Sizes & Insert Arrangements
(Front view of pin insert/rear view of socket insert shown for reference only)

Shell Size 10	Shell Size 10	Shell Size 10	Shell Size 10	Shell Size 10	Shell Size 12	Shell Size 12	Shell Size 12	Shell Size 12	Shell Size 12
10 Pos 3 x Size 16 (1.5mm ²) 13A/500V	4 Pos 4 x Size 16 (1.5mm ²) 13A/500V (N)	4(2+2)Pos MIX 2 x Size 16 (1.5mm ²) 13A 2 x Size 20 (0.5mm ²) 7.5A 500V (N)	6 Pos 6 x Size 20 (0.5mm ²) 7.5A/250V (N)	6(3+3) Pos MIX 3 x Size 16 (1.5mm ²) 13A 3 x Size 20 (0.5mm ²) 7.5A 500V	3 Pos 3 x Size 16 (1.5mm ²) 13A/600V (N)	4 Pos 4 x Size 16 (1.5mm ²) 13A/500V (R)	4(2+2) Pos MIX 2 x Size 12 (2.5mm ²) 23A 2 x Size 20 (0.5mm ²) 7.5A 500V (N)	8 Pos 8 x Size 16 (1.5mm ²) 13A/500V (R)	10 Pos 10 x Size 20 (0.5mm ²) 7.5A/250V (R)

Shell Size 14	Shell Size 14	Shell Size 14	Shell Size 14	Shell Size 14	Shell Size 14	Shell Size 14	Shell Size 14	Shell Size 14	Shell Size 14
3 Pos 3 x Size 8* (3.6mm ²) 45A/600V (N)	4 Pos 4 x Size 12 (2.5mm ²) 23A/500V (N)	4 Pos MIX 2 x Size 12 (2.5mm ²) 23A 2 x Size 16 (1.5mm ²) 13A 500V (N)	7 Pos 7 x Size 16 (1.5mm ²) 13A/500V (R)	8 Pos 8 x Size 16 (1.5mm ²) 13A/500V (N)	12 Pos 12 x Size 16 (1.5mm ²) 13A/500V (N) (R)	19 Pos 19 x Size 20 (0.5mm ²) 7.5A/250V (N)			

Connector Configurations



Backshell Cable Diameters

Shell Size 10	4.0 - 8.8mm
Shell Size 12	6.0 - 12.0mm
Shell Size 14	6.0 - 14.0mm

ecomate® Aquarius™ Fathom Lock - Accessories

Image	Part Number	Description
	FLS010DC	Shell Size 10, Dust Cap for Receptacle, ecomate® Aquarius™ Fathom Lock, Thermoplastic, Black Body
	FLS012DC	Shell Size 12, Dust Cap for Receptacle, ecomate® Aquarius™ Fathom Lock, Thermoplastic, Black Body
	FLS014DC	Shell Size 14, Dust Cap for Receptacle, ecomate® Aquarius™ Fathom Lock, Thermoplastic, Black Body
	FLS610DC	Shell Size 10, Dust Cap for Plug, ecomate® Aquarius™ Fathom Lock, Thermoplastic, Black Body
	FLS612DC	Shell Size 12, Dust Cap for Plug, ecomate® Aquarius™ Fathom Lock, Thermoplastic, Black Body
	FLS614DC	Shell Size 14, Dust Cap for Plug, ecomate® Aquarius™ Fathom Lock, Thermoplastic, Black Body
	RTS10CCRG	Shell Size 10, Coding Color Ring, ecomate® Aquarius™/ecomate® Aquarius™ Fathom Lock, Thermoplastic, Green Body
	RTS10CCRR	Shell Size 10, Coding Color Ring, ecomate® Aquarius™/ecomate® Aquarius™ Fathom Lock, Thermoplastic, Red Body
	RTS10CCRY	Shell Size 10, Coding Color Ring, ecomate® Aquarius™/ecomate® Aquarius™ Fathom Lock, Thermoplastic, Yellow Body
	RTS12CCRG	Shell Size 12, Coding Color Ring, ecomate® Aquarius™/ecomate® Aquarius™ Fathom Lock, Thermoplastic, Green Body
	RTS12CCRR	Shell Size 12, Coding Color Ring, ecomate® Aquarius™/ecomate® Aquarius™ Fathom Lock, Thermoplastic, Red Body
	RTS12CCRY	Shell Size 12, Coding Color Ring, ecomate® Aquarius™/ecomate® Aquarius™ Fathom Lock, Thermoplastic, Yellow Body
	RTS14CCRG	Shell Size 14, Coding Color Ring, ecomate® Aquarius™/ecomate® Aquarius™ Fathom Lock, Thermoplastic, Green Body
	RTS14CCRR	Shell Size 14, Coding Color Ring, ecomate® Aquarius™/ecomate® Aquarius™ Fathom Lock, Thermoplastic, Red Body
	RTS14CCRY	Shell Size 14, Coding Color Ring, ecomate® Aquarius™/ecomate® Aquarius™ Fathom Lock, Thermoplastic, Yellow Body



em eco|mate® RM

Circular, Rugged Metal Connectors for Industrial Applications



Available in 8 Shell Sizes and 32 Insert Arrangements

Amphenol Sine Systems' **ecomate® RM (Rugged Metal) Series** of circular, metal connectors provide an IP67 rating (in mated condition) for industrial applications, all in a sealed connector system. With a circular bayonet coupling system and a maximum current rating of 45A/600V, the ecomate® RM (Rugged Metal) Series is perfect for Indoor/Outdoor applications in Factory Automation, Industrial, Heavy Equipment, Heavy Duty, Transportation, and Entertainment/Lighting markets. Design is based on MIL-DTL-26482 specifications. All ecomate® RM products are compatible with other industry standard mating connectors.

Contacts are available in Machined or PCB (loose piece/bagged), or Stamped & Formed (reels) options and can be shared with the ecomate® Aquarius™, Aquarius™ Fathom Lock, and RSSM series.

Also available in an **ecomate® RM High Amperage Series** option with up to 300A/630V feat **RADSOK®** Contact Technology.

Key Features

- IP67 rated (in mated condition)
- Circular Bayonet Coupling System
- Machined, Stamped & Formed, and PCB Contacts
- MIL-DTL-26482-based Design
- EMI/RMI Shielding Capabilities
- Kits Available



Potential Applications: Factory Automation, Industrial, Heavy Equipment, Heavy Duty, Transportation, and Entertainment/Lighting markets.

ecomate® RM - Specifications (Reference Individual Datasheets)

IP Rating	IP67 (in mated condition)
Max. Current Amperage	Up to 45A
Max. Voltage Rating (AC/DC)	600V
Operating Temperature	-40°C to +125°C
Coupling System	Circular Bayonet
Housing Body	Body-Zinc Alloy; Coupling-Nickel Alum.
Contact Types	Machined, Stamped & Formed, PCB
Contact Termination	Crimp, Solder
Contact Material	Copper Alloy (Gold, Tin & Silver Plating are available)
Wire AWG Range	30 - 8AWG (0.05 - 10.0 mm ²)
Sealing Material	NBR/Silicone Rubber
Min. Mating Cycles	>500
Shielding	EMI/RMI Available

Flammability Rating	UL 94 V-0
Fluid Resistance	Gas, oil, mineral oil, acid bath, basic bath
Test Voltage Rating	1500V/2000V
Overvoltage Category	III
Strain Relief Clamp Range	1.5 - 14.0mm
Insulation Resistance	5000 megohms
Thermal Shock	No cracking, chipping or leaking after 20 test cycles from -55°C to 125°C
RoHS Compliant	RoHS ALL materials meet the requirements of the European Directive. (See website for documentation)
Approvals	UL ECBT2 & ECBT8

Connector Configurations



Standard products. Custom solutions
Customer Service +1 800 394 7732

Contact Legend (Size (mm²) Amperage)

Size 20 (0.5mm ²) 7.5A	Size 16 (1.5mm ²) 13A	Size 12 (2.5mm ²) 23A	Size 8 (3.6mm ²) 45A

Recommended Wire Insulation Overall Diameter (OD) for End Caps

Contact Size	Typical Wire Range	(N) Normal Wire Seal	(R) Reduced Wire Seal
20	20-30AWG (0.50-0.05mm ²)	1.6-2.6mm (0.063-0.102 in)	1.2mm-1.6mm (0.047-0.063 in)
16	14-24AWG (2.5-0.14mm ²)	2.0-3.2mm (0.079-0.126 in)	1.2mm-2.1mm (0.047-.083 in)
12	12-14AWG (3.5-2.5mm ²)	3.3-4.3mm (0.130-0.169 in)	-
8	10-12AWG (16.0-10.0mm ²)	2.8-5.8mm (0.110-0.228 in)	-
8*	8-16AWG (10.0-1.5mm ²)	2.8-4.1mm (0.110-0.161 in)	-

NOTE: * Applies to 14-3 insert arrangement only. See chart below.

ecomate® RM - Shell Sizes & Insert Arrangements

(Front view of pin insert/rear view of socket insert shown for reference only)

Shell Size 10	Shell Size 10	Shell Size 10	Shell Size 10	Shell Size 10	Shell Size 12	Shell Size 12	Shell Size 12	Shell Size 12	Shell Size 12
10-03 3 x Size 16 (1.5mm ²) 13A/500V	10-04 4 x Size 16 (1.5mm ²) 13A/500V (N)	10-04 (2+2) MIX 2 x Size 16 (1.5mm ²) 13A 2 x Size 20 (0.5mm ²) 7.5A 500V (N)	10-06 6 x Size 20 (0.5mm ²) 7.5A/250V (N)	10-06 (3+3) MIX 3 x Size 16 (1.5mm ²) 13A 3 x Size 20 (0.5mm ²) 7.5A 500V	12-03 3 x Size 16 (1.5mm ²) 13A/600V (N)	12-04 4 x Size 16 (1.5mm ²) 13A/500V (N) (R)	12-04 (2+2) MIX 2 x Size 12 (2.5mm ²) 23A 2 x Size 20 (0.5mm ²) 7.5A 500V (N)	12-08 8 x Size 16 (1.5mm ²) 13A/500V (N) (R)	12-10 10 x Size 20 (0.5mm ²) 7.5A/250V (N)


Shell Size 14	Shell Size 14	Shell Size 14	Shell Size 14	Shell Size 14	Shell Size 14	Shell Size 14	Shell Size 14	Shell Size 14	Shell Size 14
14-03 3 x Size 8* (3.6mm ²) 45A/600V (N)	14-04 4 x Size 12 (2.5mm ²) 23A/500V (N)	14-04 (2+2) MIX 2 x Size 12 (2.5mm ²) 23A 2 x Size 16 (1.5mm ²) 13A 500V (N)	14-07 7 x Size 16 (1.5mm ²) 13A/500V (N) (R)	14-07 (3+4) MIX 3 x Size 12 (2.5mm ²) 23A 4 x Size 16 (1.5mm ²) 13A 500V	14-08 8 x Size 16 (1.5mm ²) 13A/500V (N)	14-12 12 x Size 16 (1.5mm ²) 13A/500V (N) (R)	14-12 (8+4) MIX 8 x Size 20 (0.5mm ²) 7.5A 4 x Size 16 (1.5mm ²) 13A 500V (N)	14-15 (14+1) MIX 14 x Size 20 (0.5mm ²) 7.5A 1 x Size 16 (1.5mm ²) 13A 500V (N)	14-19 19 x Size 20 (0.5mm ²) 7.5A/250V (N)

Shell Size 16	Shell Size 16	Shell Size 16	Shell Size 16	Shell Size 16	Shell Size 18	Shell Size 18	Shell Size 18	Shell Size 20	Shell Size 22
16-04 4 x Size 8* (3.6mm ²) 45A/600V (N)	16-09 (4+5) MIX 4 x Size 12 (2.5mm ²) 23A 5 x Size 16 (1.5mm ²) 13A 500V (N)	16-13 (3+10) MIX 3 x Size 12 (2.5mm ²) 20A 10 x Size 20 (0.5mm ²) 5A 500V (N)	16-19 19 x Size 16 (1.5mm ²) 13A/500V (N)	16-26 26 x Size 20 (0.5mm ²) 7.5A/250V (N)	18-08 8 x Size 12 (2.5mm ²) 23A/500V (N)	18-23 23 x Size 16 (1.5mm ²) 13A/500V (N) (R)	18-32 32 x Size 20 (0.5mm ²) 7.5A/250V (N)	20-28* 28 x Size 16 (1.5mm ²) 13A/500V (N) (R)	22-35 35 x Size 16 (1.5mm ²) 13A/500V


Shell Size 22	Shell Size 24
22-38 38 x Size 16 (1.5mm ²) 13A/500V	24-48 48 x Size 16 (1.5mm ²) 13A/500V


Backshell Cable Diameters	
Shell Size 10	4.0 - 8.8mm
Shell Size 12	6.0 - 12.0mm
Shell Size 14	6.0 - 14.0mm
Shell Size 16	10.0 - 17.0mm
Shell Size 18	10.0 - 18.0mm
Shell Size 20	10.0 - 18.0mm
Shell Size 22	13.5 - 24.0mm
Shell Size 24	20.5 - 22.5mm

ecomate® RM - Accessories


Image	Part Number	Description
	RT0B-12CG-NS1	Shell Size 12, Cord Grip Right Angle, ecomate® RM, Cable OD Range 6.5-10.0mm, Zinc Alloy, Silver Body
	RT0B-12CG-NS2	Shell Size 12, Cord Grip Right Angle, ecomate® RM, Cable OD Range 9.0-12.5mm, Zinc Alloy, Silver Body
	RT0B-14CG-NS1	Shell Size 14, Cord Grip Right Angle, ecomate® RM, Cable OD Range 6.5-10.0mm, Zinc Alloy, Silver Body
	RT0B-14CG-NS2	Shell Size 14, Cord Grip Right Angle, ecomate® RM, Cable OD Range 9.0-12.5mm, Zinc Alloy, Silver Body
	RT0B-16CG-NS1	Shell Size 16, Cord Grip Right Angle, ecomate® RM, Cable OD Range 10.0-14.0mm, Zinc Alloy, Silver Body
	RT0B-16CG-NS2	Shell Size 16, Cord Grip Right Angle, ecomate® RM, Cable OD Range 13.5-17.0mm, Zinc Alloy, Silver Body

	RT0L-10CG-NS1	Shell Size 10, Cord Grip Straight - Long, ecomate® RM, Cable OD Range 3.0-5.0mm, Zinc Alloy, Silver Body
	RT0L-10CG-NS2	Shell Size 10, Cord Grip Straight - Long, ecomate® RM, Cable OD Range 5.0-8.5mm, Zinc Alloy, Silver Body
	RT0L-12CG-NS1	Shell Size 12, Cord Grip Straight - Long, ecomate® RM, Cable OD Range 6.5-10.0mm, Zinc Alloy, Silver Body
	RT0L-12CG-NS2	Shell Size 12, Cord Grip Straight - Long, ecomate® RM, Cable OD Range 9.0-12.5mm, Zinc Alloy, Silver Body
	RT0L-14CG-NS1	Shell Size 14, Cord Grip Straight - Long, ecomate® RM, Cable OD Range 6.5-10.0mm, Zinc Alloy, Silver Body
	RT0L-14CG-NS2	Shell Size 14, Cord Grip Straight - Long, ecomate® RM, Cable OD Range 9.0-12.5mm, Zinc Alloy, Silver Body
	RT0L-16CG-NS1	Shell Size 16, Cord Grip Straight - Long, ecomate® RM, Cable OD Range 10.0-14.0mm, Zinc Alloy, Silver Body
	RT0L-16CG-NS2	Shell Size 16, Cord Grip Straight - Long, ecomate® RM, Cable OD Range 13.5-17.0mm, Zinc Alloy, Silver Body
	RT0L-18CG-NS1	Shell Size 18, Cord Grip Straight - Long, ecomate® RM, Cable OD Range 10.0-14.0mm, Zinc Alloy, Silver Body
	RT0L-18CG-NS2	Shell Size 18, Cord Grip Straight - Long, ecomate® RM, Cable OD Range 13.5-17.0mm, Zinc Alloy, Silver Body
	RT0L-20CG-S6	Shell Size 20, Cord Grip Straight - Long, ecomate® RM, Cable OD Range 15.0-17.0mm, Zinc Alloy, Silver Body
	RT0L-20CPG-S1	Shell Size 20, Cord Grip Straight - Long, ecomate® RM, Cable OD Range 16.0-17.0mm, Zinc Alloy, Silver Body
	RT0L-20CPG-S2	Shell Size 20, Cord Grip Straight - Long, ecomate® RM, Cable OD Range 20.5-22.5mm, Zinc Alloy, Silver Body
	RT0L-20CPG-S3	Shell Size 20, Cord Grip Straight - Long, ecomate® RM, Cable OD Range 13.5-15.0mm, Zinc Alloy, Silver Body
	RT0L-20CPG-S5	Shell Size 20, Cord Grip Straight - Long, ecomate® RM, Cable OD Range 13.5-14.0mm, Zinc Alloy, Silver Body
	RT0L-20CPG-S6	Shell Size 20, Cord Grip Straight - Long, ecomate® RM, Cable OD Range 16.0-21.0mm, Zinc Alloy, Silver Body
RT0L-22CG-NS1	Shell Size 22, Cord Grip Straight - Long, ecomate® RM, Cable OD Range 13.5-18.0mm, Zinc Alloy, Silver Body	
RT0L-22CG-NS2	Shell Size 22, Cord Grip Straight - Long, ecomate® RM, Cable OD Range 18.0-24.0mm, Zinc Alloy, Silver Body	
RT0L-24CPG-S1	Shell Size 24, Cord Grip Straight - Long, ecomate® RM, Cable OD Range 20.5-22.5mm, Zinc Alloy, Silver Body	


	RT0S-10CG-NS1	Shell Size 10, Cord Grip Straight - Short, ecomate® RM, Cable OD Range 3.0-5.0mm, Zinc Alloy, Silver Body
	RT0S-10CG-NS2	Shell Size 10, Cord Grip Straight - Short, ecomate® RM, Cable OD Range 5.0-8.5mm, Zinc Alloy, Silver Body
	RT0S-12CG-NS1	Shell Size 12, Cord Grip Straight - Short, ecomate® RM, Cable OD Range 6.5-10.0mm, Zinc Alloy, Silver Body
	RT0S-12CG-NS2	Shell Size 12, Cord Grip Straight - Short, ecomate® RM, Cable OD Range 9.0-12.5mm, Zinc Alloy, Silver Body
	RT0S-14CG-NS1	Shell Size 14, Cord Grip Straight - Short, ecomate® RM, Cable OD Range 6.5-10.0mm, Zinc Alloy, Silver Body
	RT0S-14CG-NS2	Shell Size 14, Cord Grip Straight - Short, ecomate® RM, Cable OD Range 9.0-12.5mm, Zinc Alloy, Silver Body
	RT0S-16CG-NS1	Shell Size 16, Cord Grip Straight - Short, ecomate® RM, Cable OD Range 10.0-14.0mm, Zinc Alloy, Silver Body
	RT0S-16CG-NS2	Shell Size 16, Cord Grip Straight - Short, ecomate® RM, Cable OD Range 13.5-17.0mm, Zinc Alloy, Silver Body
RT0S-18CG-NS1	Shell Size 18, Cord Grip Straight - Short, ecomate® RM, Cable OD Range 10.0-14.0mm, Zinc Alloy, Silver Body	
RT0S-18CG-NS2	Shell Size 18, Cord Grip Straight - Short, ecomate® RM, Cable OD Range 13.5-17.0mm, Zinc Alloy, Silver Body	


	RT610DCG	Shell Size 10, Dust Cap w Chain for Plug, ecomate® RM, Zinc Alloy, Silver Body
	RT612DCG	Shell Size 12, Dust Cap w Chain for Plug, ecomate® RM, Zinc Alloy, Silver Body
	RT614DCG	Shell Size 14, Dust Cap w Chain for Plug, ecomate® RM, Zinc Alloy, Silver Body
	RT616DCG	Shell Size 16, Dust Cap w Chain for Plug, ecomate® RM, Zinc Alloy, Silver Body
	RT618DCG	Shell Size 18, Dust Cap w Chain for Plug, ecomate® RM, Zinc Alloy, Silver Body
	RT620DCG	Shell Size 20, Dust Cap w Chain for Plug, ecomate® RM, Zinc Alloy, Silver Body

	RB00011910	Shell Size 10, Dust Cap for Receptacle, ecomate® RM, Silicone Rubber, Black Body
	RB00011912	Shell Size 12, Dust Cap for Receptacle, ecomate® RM, Silicone Rubber, Black Body
	RB00011914	Shell Size 14, Dust Cap for Receptacle, ecomate® RM, Silicone Rubber, Black Body
	RB00011916	Shell Size 16, Dust Cap for Receptacle, ecomate® RM, Silicone Rubber, Black Body
	RB00011918	Shell Size 18, Dust Cap for Receptacle, ecomate® RM, Silicone Rubber, Black Body
	RB00011920	Shell Size 20, Dust Cap for Receptacle, ecomate® RM, Silicone Rubber, Black Body

Image	Part Number	Description
	RT010RL	Shell Size 10, Dust Cap w Tether for Receptacle, ecomate® RM, Silicone Rubber, Black Body
	RT012RL	Shell Size 12, Dust Cap w Tether for Receptacle, ecomate® RM, Silicone Rubber, Black Body
	RT014RL	Shell Size 14, Dust Cap w Tether for Receptacle, ecomate® RM, Silicone Rubber, Black Body
	RT016RL	Shell Size 16, Dust Cap w Tether for Receptacle, ecomate® RM, Silicone Rubber, Black Body
	RT018RL	Shell Size 18, Dust Cap w Tether for Receptacle, ecomate® RM, Silicone Rubber, Black Body
	RT020RL	Shell Size 20, Dust Cap w Tether for Receptacle, ecomate® RM, Silicone Rubber, Black Body

	RT010DCG	Shell Size 10, Dust Cap w Chain for Receptacle, ecomate® RM, Zinc Alloy, Silver Body
	RT012DCG	Shell Size 12, Dust Cap w Chain for Receptacle, ecomate® RM, Zinc Alloy, Silver Body
	RT014DCG	Shell Size 14, Dust Cap w Chain for Receptacle, ecomate® RM, Zinc Alloy, Silver Body
	RT016DCG	Shell Size 16, Dust Cap w Chain for Receptacle, ecomate® RM, Zinc Alloy, Silver Body
	RT018DCG	Shell Size 18, Dust Cap w Chain for Receptacle, ecomate® RM, Zinc Alloy, Silver Body
	RT020DCG	Shell Size 20, Dust Cap w Chain for Receptacle, ecomate® RM, Zinc Alloy, Silver Body
	RT024DCG	Shell Size 24, Dust Cap w Chain for Receptacle, ecomate® RM, Zinc Alloy, Silver Body

	RTFD08B	Shell Size 8, Gasket for Square Flange Receptacle, ecomate® RM, EPDM, Black Body
	RTFD10B	Shell Size 10, Gasket for Square Flange Receptacle, ecomate® RM, EPDM, Black Body
	RTFD12B	Shell Size 12, Gasket for Square Flange Receptacle, ecomate® RM, EPDM, Black Body
	RTFD14B	Shell Size 14, Gasket for Square Flange Receptacle, ecomate® RM, EPDM, Black Body
	RTFD16B	Shell Size 16, Gasket for Square Flange Receptacle, ecomate® RM, EPDM, Black Body
	RTFD18B	Shell Size 18, Gasket for Square Flange Receptacle, ecomate® RM, EPDM, Black Body
	RTFD22B	Shell Size 22, Gasket for Square Flange Receptacle, ecomate® RM, EPDM, Black Body
	RTFD24B	Shell Size 24, Gasket for Square Flange Receptacle, ecomate® RM, EPDM, Black Body

	108039110	Shell Size 10, Locking Clip w Lanyard, ecomate® RM, Black Body
	108039112	Shell Size 12, Locking Clip w Lanyard, ecomate® RM, Black Body
	108039114	Shell Size 14, Locking Clip w Lanyard, ecomate® RM, Black Body
	108039116	Shell Size 16, Locking Clip w Lanyard, ecomate® RM, Black Body
	108039118	Shell Size 18, Locking Clip w Lanyard, ecomate® RM, Black Body
	108039120	Shell Size 20, Locking Clip w Lanyard, ecomate® RM, Black Body
	108039122	Shell Size 22, Locking Clip w Lanyard, ecomate® RM, Black Body
	108039124	Shell Size 24, Locking Clip w Lanyard, ecomate® RM, Black Body



em eco|mate® RSSM

Circular, Rugged, Superior Seal, Metal Connectors for Industrial Applications



Available in 8 Shell Sizes and 28 Insert Arrangements

Amphenol Sine Systems' **ecomate® RSSM** (Rugged **Superior Seal Metal**) **Series** of circular metal connectors matches all the specifications of the ecomate® RM (Rugged Metal) series with the addition of **Superior Seals** (+125°C) which increase the IP ratings to IP69K (in mated condition). ecomate® RSSM Plugs are only to be mated with ecomate® RSSM Receptacles to ensure an IP69K rating.

Contacts are available in Machined or PCB (loose piece/bagged), or Stamped & Formed (reels) options and can be shared with the ecomate® Aquarius™, Aquarius™ Fathom Lock, and RM series.

Key Features

- IP67 and IP69K rated (in mated condition)
- Circular Bayonet Coupling System
- Machined, Stamped & Formed, RADSOX® and PCB Contacts
- MIL-DTL-26482-based Design
- EMI/RMI Shielding Capabilities
- Kits Available



Potential Applications: Factory Automation, Industrial, Heavy Equipment, Heavy Duty, Transportation, Entertainment/Lighting markets, On-Machine, Robotics, Rail Transit, EV Bus/Truck, I/O Module, Servo Motor, Servo Drive, PLC Programmable Logic Controller, HMI/CNC.

ecomate® RSSM - Specifications (Reference Individual Datasheets)

IP Rating	IP67 and IP69K (in mated condition)
Max. Current Amperage	Up to 45A
Max. Voltage Rating (AC/DC)	600V
Operating Temperature	-40°C to +125°C
Coupling System	Circular Bayonet
Housing Body	Body-Zinc Alloy; Coupling-Nickel Alum.
Contact Types	Machined, Stamped & Formed, PCB
Contact Termination	Crimp, Solder
Contact Material	Copper Alloy (Gold, Tin & Silver Plating are available)
Wire AWG Range	30 - 8AWG (0.05 - 10.0 mm²)
Sealing Material	NBR/Silicone Rubber
Min. Mating Cycles	>500
Shielding	EMI/RMI Available

Flammability Rating	UL 94 V-0
Fluid Resistance	Gas, oil, mineral oil, acid bath, basic bath
Test Voltage Rating	1500V/2000V
Overvoltage Category	III
Strain Relief Clamp Range	1.5 - 14.0mm
Insulation Resistance	5000 megohms
Thermal Shock	No cracking, chipping or leaking after 20 test cycles from -55°C to 125°C
RoHS Compliant	RoHS ALL materials meet the requirements of the European Directive. (See website for documentation)
Approvals	UL ECBT2 & ECBT8

Connector Configurations



Standard products. Custom solutions
Customer Service +1 800 394 7732

Contact Legend (Size (mm²) Amperage)

Size 20 (0.5mm ²) 7.5A	Size 16 (1.5mm ²) 13A	Size 12 (2.5mm ²) 23A	Size 8 (3.6mm ²) 45A

Recommended Wire Insulation Overall Diameter (OD) for End Caps

Contact Size	Typical Wire Range	(N) Normal Wire Seal	(R) Reduced Wire Seal
20	20-30AWG (0.50-0.05mm ²)	1.6-2.6mm (0.063-0.102 in)	1.2mm-1.6mm (0.047-0.063 in)
16	14-24AWG (2.5-0.14mm ²)	2.0-3.2mm (0.079-0.126 in)	1.2mm-2.1mm (0.047-.083 in)
12	12-14AWG (3.5-2.5mm ²)	3.3-4.3mm (0.130-0.169 in)	-
8	10-12AWG (16.0-10.0mm ²)	2.8-5.8mm (0.110-0.228 in)	-
8*	8-16AWG (10.0-1.5mm ²)	2.8-4.1mm (0.110-0.161 in)	-

NOTE: * Applies to 14-3 insert arrangement only. See chart below.

ecomate® RSSM - Shell Sizes & Insert Arrangements





(Front view of pin insert/rear view of socket insert shown for reference only)

Shell Size 10	Shell Size 10	Shell Size 10	Shell Size 10	Shell Size 10	Shell Size 12	Shell Size 12	Shell Size 12	Shell Size 12	Shell Size 12
10-03 3 x Size 16 (1.5mm ²) 13A/500V	10-04 4 x Size 16 (1.5mm ²) 13A/500V (N)	10-04 (2+2) MIX 2 x Size 16 (1.5mm ²) 13A 2 x Size 20 (0.5mm ²) 7.5A 500V (N)	10-06 6 x Size 20 (0.5mm ²) 7.5A/250V (N)	10-06 (3+3) MIX 3 x Size 16 (1.5mm ²) 13A 3 x Size 20 (0.5mm ²) 7.5A 500V	12-03 3 x Size 16 (1.5mm ²) 13A/600V (N)	12-04 4 x Size 16 (1.5mm ²) 13A/500V (N) (R)	12-04 (2+2) MIX 2 x Size 12 (2.5mm ²) 23A 2 x Size 20 (0.5mm ²) 7.5A 500V (N)	12-08 8 x Size 16 (1.5mm ²) 13A/500V (N) (R)	12-10 10 x Size 20 (0.5mm ²) 7.5A/250V (N)
Shell Size 14	Shell Size 14	Shell Size 14	Shell Size 14	Shell Size 14	Shell Size 14	Shell Size 14	Shell Size 16	Shell Size 16	Shell Size 16
14-03 3 x Size 8* (3.6mm ²) 45A/600V (N)	14-04 4 x Size 12 (2.5mm ²) 23A/500V (N)	14-04 (2+2) MIX 2 x Size 12 (2.5mm ²) 23A 2 x Size 16 (1.5mm ²) 13A 500V (N)	14-07 7 x Size 16 (1.5mm ²) 13A/500V (N) (R)	14-08 8 x Size 16 (1.5mm ²) 13A/500V (N)	14-12 12 x Size 16 (1.5mm ²) 13A/500V (N) (R)	14-19 19 x Size 20 (0.5mm ²) 7.5A/250V (N)	16-04 4 x Size 8 (3.6mm ²) 45A/600V (N)	16-09 (4+5) MIX 4 x Size 12 (2.5mm ²) 23A 5 x Size 16 (1.5mm ²) 13A 500V (N)	16-19 19 x Size 16 (1.5mm ²) 13A/500V (N)
Shell Size 16	Shell Size 18	Shell Size 18	Shell Size 18	Shell Size 20	Shell Size 22	Shell Size 22	Shell Size 24		
16-26 26 x Size 20 (0.5mm ²) 7.5A/250V (N)	18-08 8 x Size 12 (2.5mm ²) 23A/500V (N)	18-23 23 x Size 16 (1.5mm ²) 13A/500V (N) (R)	18-32 32 x Size 20 (0.5mm ²) 7.5A/250V (N)	20-28* 28 x Size 16 (1.5mm ²) 13A/500V (N) (R)	22-35 35 x Size 16 (1.5mm ²) 13A/500V (N) (R)	22-38 38 x Size 16 (1.5mm ²) 13A/500V (N) (R)	24-48 48 x Size 16 (1.5mm ²) 13A/500V (N) (R)		

Backshell Cable Diameters

Shell Size 10	4.0 - 8.8mm
Shell Size 12	6.0 - 12.0mm
Shell Size 14	6.0 - 14.0mm
Shell Size 16	10.0 - 17.0mm
Shell Size 18	10.0 - 18.0mm
Shell Size 20	10.0 - 18.0mm
Shell Size 22	13.5 - 24.0mm
Shell Size 24	20.5 - 22.5mm

ecomate® RSSM - Accessories

Image	Part Number	Description
	RT0B-12CG-NS1	Shell Size 12, Cord Grip Right Angle, ecomate® RSSM, Cable OD Range 6.5-10.0mm, Zinc Alloy, Silver Body
	RT0B-12CG-NS2	Shell Size 12, Cord Grip Right Angle, ecomate® RSSM, Cable OD Range 9.0-12.5mm, Zinc Alloy, Silver Body
	RT0B-14CG-NS1	Shell Size 14, Cord Grip Right Angle, ecomate® RSSM, Cable OD Range 6.5-10.0mm, Zinc Alloy, Silver Body
	RT0B-14CG-NS2	Shell Size 14, Cord Grip Right Angle, ecomate® RSSM, Cable OD Range 9.0-12.5mm, Zinc Alloy, Silver Body
	RT0B-16CG-NS1	Shell Size 16, Cord Grip Right Angle, ecomate® RSSM, Cable OD Range 10.0-14.0mm, Zinc Alloy, Silver Body
	RT0B-16CG-NS2	Shell Size 16, Cord Grip Right Angle, ecomate® RSSM, Cable OD Range 13.5-17.0mm, Zinc Alloy, Silver Body
	RT0L-10CG-NS1	Shell Size 10, Cord Grip Straight - Long, ecomate® RSSM, Cable OD Range 3.0-5.0mm, Zinc Alloy, Silver Body
	RT0L-10CG-NS2	Shell Size 10, Cord Grip Straight - Long, ecomate® RSSM, Cable OD Range 5.0-8.5mm, Zinc Alloy, Silver Body
	RT0L-12CG-NS1	Shell Size 12, Cord Grip Straight - Long, ecomate® RSSM, Cable OD Range 6.5-10.0mm, Zinc Alloy, Silver Body
	RT0L-12CG-NS2	Shell Size 12, Cord Grip Straight - Long, ecomate® RSSM, Cable OD Range 9.0-12.5mm, Zinc Alloy, Silver Body
	RT0L-14CG-NS1	Shell Size 14, Cord Grip Straight - Long, ecomate® RSSM, Cable OD Range 6.5-10.0mm, Zinc Alloy, Silver Body
	RT0L-14CG-NS2	Shell Size 14, Cord Grip Straight - Long, ecomate® RSSM, Cable OD Range 9.0-12.5mm, Zinc Alloy, Silver Body
	RT0L-16CG-NS1	Shell Size 16, Cord Grip Straight - Long, ecomate® RSSM, Cable OD Range 10.0-14.0mm, Zinc Alloy, Silver Body
	RT0L-16CG-NS2	Shell Size 16, Cord Grip Straight - Long, ecomate® RSSM, Cable OD Range 13.5-17.0mm, Zinc Alloy, Silver Body
	RT0L-18CG-NS1	Shell Size 18, Cord Grip Straight - Long, ecomate® RSSM, Cable OD Range 10.0-14.0mm, Zinc Alloy, Silver Body
	RT0L-18CG-NS2	Shell Size 18, Cord Grip Straight - Long, ecomate® RSSM, Cable OD Range 13.5-17.0mm, Zinc Alloy, Silver Body
	RT0L-22CG-NS1	Shell Size 22, Cord Grip Straight - Long, ecomate® RSSM, Cable OD Range 13.5-18.0mm, Zinc Alloy, Silver Body
	RT0L-22CG-NS2	Shell Size 22, Cord Grip Straight - Long, ecomate® RSSM, Cable OD Range 18.0-24.0mm, Zinc Alloy, Silver Body
	RT0S-12CG-NS1	Shell Size 12, Cord Grip Straight - Short, ecomate® RSSM, Cable OD Range 6.5-10.0mm, Zinc Alloy, Silver Body
	RT0S-12CG-NS2	Shell Size 12, Cord Grip Straight - Short, ecomate® RSSM, Cable OD Range 9.0-12.5mm, Zinc Alloy, Silver Body
	RT0S-14CG-NS1	Shell Size 14, Cord Grip Straight - Short, ecomate® RSSM, Cable OD Range 6.5-10.0mm, Zinc Alloy, Silver Body
	RT0S-14CG-NS2	Shell Size 14, Cord Grip Straight - Short, ecomate® RSSM, Cable OD Range 9.0-12.5mm, Zinc Alloy, Silver Body
	RT0S-16CG-NS1	Shell Size 16, Cord Grip Straight - Short, ecomate® RSSM, Cable OD Range 10.0-14.0mm, Zinc Alloy, Silver Body
	RT0S-16CG-NS2	Shell Size 16, Cord Grip Straight - Short, ecomate® RSSM, Cable OD Range 13.5-17.0mm, Zinc Alloy, Silver Body
	RT0S-18CG-NS1	Shell Size 18, Cord Grip Straight - Short, ecomate® RSSM, Cable OD Range 10.0-14.0mm, Zinc Alloy, Silver Body
	RT0S-18CG-NS2	Shell Size 18, Cord Grip Straight - Short, ecomate® RSSM, Cable OD Range 13.5-17.0mm, Zinc Alloy, Silver Body
	RT022DCG	Shell Size 22, Dust Cap for Receptacle, ecomate® RSSM, Zinc Alloy, Silver Body



em eco|mate® RM High Amp

Circular, Rugged Metal, High Amperage Connectors for Industrial Applications



Available in 4 Shell Sizes and 5 Insert Arrangements

Amphenol Sine Systems' **ecomate® RM High Amperage Series** of connectors matches all the specifications of the ecomate® RM (Rugged Metal) Series with the addition of high amperage connector options in 1 and 3 pole, high power arrangements feat RADSOK® Contact Technology, up to 300A/630V.

Key Features

- IP67 rated (in mated condition)
- Circular Bayonet Coupling System
- 3.6mm - 10mm Contact Sizes
- MIL-DTL-26482-based Design
- EMI/RMI Shielding Capabilities



Potential Applications: Factory Automation, Industrial, Heavy Equipment, Heavy Duty, Transportation, and Entertainment/Lighting markets.

ecomate® RM High Amp - Specifications (Reference Individual Datasheets)

IP Rating	IP67 (in mated condition)
Max. Current Amperage	Up to 300A
Max. Voltage Rating (AC/DC)	630V
Operating Temperature	-40°C to +125°C
Coupling System	Circular Bayonet
Housing Body	Body-Zinc Alloy; Coupling-Nickel Alum.
Contact Types	RADSOK®
Contact Termination	Crimp, Flat Tail, Screw Tail
Contact Material	Copper Alloy, Silver Plated
Wire AWG Range	8 - 3/0AWG (10 - 95mm²)
Sealing Material	Silicone Rubber
Min. Mating Cycles	>500
Shielding	EMI/RMI Available

Flammability Rating	UL 94 V-0
Fluid Resistance	Gas, oil, mineral oil, acid bath, basic bath
Test Voltage Rating	5000V
Overvoltage Category	III
Strain Relief Clamp Range	1.5 - 14.0mm
Insulation Resistance	5000 megohms
Thermal Shock	No cracking, chipping or leaking after 20 test cycles from -55°C to 125°C
RoHS Compliant	RoHS ALL materials meet the requirements of the European Directive. (See website for documentation)
Approvals	UL ECBT2 & ECBT8

Connector Configurations

12-1, 14-1, 16-1 and 20-1				
Straight Plug Female w RADSOK® Socket	90 Right Angle Plug Female w RADSOK® Socket	Square Flange Receptacle Male w RADSOK® Crimp Pin	Square Flange Receptacle Male w RADSOK® Flat Tail Pin	Square Flange Receptacle Male w RADSOK® Screw Tail Pin

20-3			
Straight Plug Male w RADSOK® Pin	Straight Plug Female w RADSOK® Socket	Square Flange Receptacle Male w RADSOK® Pin	Square Flange Receptacle Female w RADSOK® Socket



Standard products. Custom solutions
Customer Service +1 800 394 7732

ecomate® RM High Amp - Shell Sizes & Insert Arrangements
(Front view of pin insert/rear view of socket insert shown for reference only)

Shell Size 12	Shell Size 14	Shell Size 16	Shell Size 20	Shell Size 20
1 Pos 1 x 3.6mm ² 86A/630V	1 Pos 1 x 6.0mm ² 120A/630V	1 Pos 1 x 8.0mm ² 120A-180A/630V	1 Pos 1 x 10.0mm ² 120A-300A/630V	3 Pos 3 x 3.6mm ² 86A/630V

Contact Legend



Contact Legend (Size mm² / Amperage)

8AWG 3.6mm ² 86A	4AWG 6.0mm ² 120A	1/0AWG 8.0mm ² 120-180A	3/0AWG 10.0mm ² 120-300A

Backshell Cable Diameters

Shell Size 12	9.0 - 12.5mm
Shell Size 14	9.0 - 14.0mm
Shell Size 16	9.0 - 17.0mm
Shell Size 20	13.5 - 22.5mm



em eco|mate® Contacts

Machined, Stamped & Formed and RADSOK® Precision Connector Contacts

Amphenol Sine Systems is your trusted component source for precision connector contacts designed for increased reliability and reduced cost. Our ecomate® contacts are readily available in a wide variety of materials and plating combinations and can be supplied with a variety of contact types.

Amphenol Sine Systems' **ecomate® Aquarius™**, **ecomate® Aquarius™ Fathom Lock**, **ecomate® RM**, **ecomate® RSSM** and **ecomate® RM High Amp** circular, multiway connectors provide an IP67-69k rating range (in mated condition) for indoor/outdoor industrial applications and feature robust, durable plastic or metal designs with either bayonet or rapid coupling systems. With a max. amperage/voltage range up to 45A-300A/600V-900V, depending on the series, our ecomate® Family of products are perfect for a wide range of Factory Automation, Industrial, Heavy Equipment, Heavy Duty, Transportation, and Entertainment/Lighting markets.

We can custom design, engineer and manufacture cable assemblies to your exact customer specifications and produce large or small quantities, all to the highest standards, delivered on-time and in-specification, all with a significant cost-savings over the competition.

Machined Contacts

Designed for heavy duty applications, these solid contacts will accommodate greater wire sizes

- Wire Size Range: 30AWG to 8AWG (0.05 - 10mm²)
- Available in Size 20, 16, 12 and 8 in both Pin and Socket
- Current Rating Range: 7.5A to 45A
- Copper Alloy
- Gold, Gold Flash, Tin, and Silver plating options available



Stamped & Formed Contacts

Precision-engineered, stamped & formed design provides cost-effective wire processing, while ensuring high reliability conductor termination and performance

- Wire Size Range: 20AWG to 12AWG (0.5 - 3.5mm²)
- Available in Size 20, 16 and 12 in both Pin and Socket
- Current Rating Range: 5A to 23A
- Copper Alloy and Stainless Steel
- Gold, Gold Flash, and Tin plating options available
- Insulation Support Included



RADSOK® Machined Contacts

RADSOK® technology is based on a stamped and formed flat grid, uniquely twisted into a hyperbolic geometry to provide robust, high density contact to the mating pin contact.

- Wire Size Range: 8AWG to 3/0 AWG (10 - 95mm²)
- Available in Size 8AWG, 4AWG, 2AWG, 1AWG, 2/0AWG, and 3/0AWG in Pin, Socket, Flathole Tail and Screw Tail
- Current Rating Range: 45A to 300A
- Copper Alloy, Silver-Plated



Standard products. Custom solutions
Customer Service +1 800 394 7732

ecomate® Contacts - Machined, Crimp
(Plating Options - Replace "x" in part number with appropriate Symbol from chart below.)

Size 20 (1.0mm), 7.5A				
Part Number		Wire Range (AWG)	Wire Range (mm ²)	Use with Endcap
Male Pin	Female Socket			
MP18W23x	MS18W23x	20 - 18AWG	0.50 - 0.75 mm ²	Yes
MP20W23x	MS20W23x	22 - 20AWG	0.34 - 0.50 mm ²	Yes
MP24W23x	MS24W23x	26 - 24AWG	0.13 - 0.25 mm ²	Yes
MP28W23x	MS28W23x	30 - 28AWG	0.05 - 0.08 mm ²	Yes
Size 16 (1.6mm), 13A				
Part Number		Wire Range (AWG)	Wire Range (mm ²)	Use with Endcap
Male Pin	Female Socket			
MP14M23x	MS14M23x	16 - 14AWG	1.5 - 2.5 mm ²	Yes
MP16M23x	MS16M23x	18 - 16AWG	0.75 - 1.50 mm ²	Yes
MP20M23x	MS20M23x	22 - 20AWG	0.34 - 0.50 mm ²	Yes
MP24M23x	MS24M23x	26 - 24AWG	0.14 - 0.25 mm ²	Yes
MP28M23x	MS28M23x	30 - 28AWG	0.14 - 0.05 mm ²	Yes
Size 12 (2.5mm), 23A				
Part Number		Wire Range (AWG)	Wire Range (mm ²)	Use with Endcap
Male Pin	Female Socket			
MP10B23x	MS10B23x	12-10AWG	4.0 - 6.0 mm ²	Yes
Size 8 (3.6mm), 45A - For use with 1403 Layout Only				
Part Number		Wire Range (AWG)	Wire Range (mm ²)	Use with Endcap
Male Pin	Female Socket			
MP10A23x-10	MS10A23x-10	8AWG	10mm ²	No
MP10A23x-63	MS10A23x-63	12 - 10AWG	4.0 - 6.0 mm ²	No
-	MS10A23x-63W	12 - 10AWG	4.0 - 6.0 mm ²	Yes
MP10A23xL	-	12 - 10AWG	3.0 - 6.0 mm ²	Yes
MP10A23x-25	MS10A23x-25	16 - 14AWG	1.5 - 2.5 mm ²	No
-	MS10A23x-25W	16 - 14AWG	1.5 - 2.5 mm ²	Yes
Size 8 (3.6mm), 45A - For use with 1604 Layout Only				
Part Number		Wire Range (AWG)	Wire Range (mm ²)	Use with Endcap
Male Pin	Female Socket			
MP10A23x	MS10S23x	12 - 10AWG	3.0 - 6.0 mm ²	Yes

ecomate® Contacts - Stamped & Formed, Crimped
(Plating Options - Replace "x" in part number with appropriate Symbol from chart below.)

Size 20 (1.0mm), 5A				
Part Number		Wire Range (AWG)	Wire Range (mm ²)	Use with Endcap
Male Pin	Female Socket			
SP20W2x	SS20W2x	22 - 18AWG	0.34 - 0.75 mm ²	Yes
SP24W2x	SS24W2x	26 - 24AWG	0.13 - 0.25 mm ²	Yes
SP28W2x	SS28W2x	30 - 28AWG	0.05 - 0.08 mm ²	Yes
Size 16 (1.6mm), 13A				
Part Number		Wire Range (AWG)	Wire Range (mm ²)	Use with Endcap
Male Pin	Female Socket			
SP14M2x	SS14M2x	16 - 14AWG	1.5 - 2.5 mm ²	Yes
SP16M2x	SS16M2x	18 - 16AWG	0.75 - 1.50 mm ²	Yes
SP20M2x	SS20M2x	22 - 20AWG	0.34 - 0.50 mm ²	Yes
SP24M2x	SS24M2x	26 - 24AWG	0.14 - 0.25 mm ²	Yes
Size 12 (2.5mm), 23A				
Part Number		Wire Range (AWG)	Wire Range (mm ²)	Use with Endcap
Male Pin	Female Socket			
SP12A1T	SS12A1T	14 - 12AWG	2.5 - 3.5 mm ²	Yes

Plating Options - Replace "x" in part number with appropriate Symbol			
Symbol	Plating	Symbol	Plating
T	Tin Plating Over Nickel	G5	Gold Plating (Thickness 5µ")
S	Silver Plating Over Nickel	G10	Gold Plating (Thickness 10µ")
F	Gold Flash Plating	G15	Gold Plating (Thickness 15µ")
		G30	Gold Plating (Thickness 30µ")

ecomate® Contacts - RADSOK® Crimp Barrel, Flathole Tail or Screw Tail

Part Number		Type	Contact Size (AWG)	Contact Size (mm)	Wire Range (AWG)	Wire Range (mm ²)	Amperage	Plating	Contact Material
Male Pin	Female Socket								
MP6ARS8S	MS6ARS8S	Crimp Barrel	8AWG	3.6 mm	8-6AWG	10 - 16 mm ²	86A	Silver	Copper Alloy
MP6ARS8S-10	MS6ARS8S-10	Crimp Barrel	8AWG	3.6 mm	8-6AWG	10 - 16 mm ²	45A	Silver	Copper Alloy
HP25BCS	HS25BCS	Crimp Barrel	4AWG	6 mm	4AWG	20 - 25 mm ²	120A	Silver	Copper Alloy
HPBHS	N/A	Flathole Tail	4AWG	6 mm	4AWG	20 - 25 mm ²	120A	Silver	Copper Alloy
HPBSS	N/A	Screw Tail	4AWG	6 mm	4AWG	20 - 25 mm ²	120A	Silver	Copper Alloy
HP25CCS	HS25CCS	Crimp Barrel	4AWG	8 mm	4AWG	20 - 25 mm ²	120A	Silver	Copper Alloy
HP35CCS	HS35CCS	Crimp Barrel	2AWG	8 mm	2AWG	30 - 35 mm ²	130A	Silver	Copper Alloy
HP50CCS	HS50CCS	Crimp Barrel	1AWG	8 mm	1AWG	40 - 50 mm ²	180A	Silver	Copper Alloy
HPCHS	N/A	Flathole Tail	1AWG	8 mm	1AWG	40 - 50 mm ²	180A	Silver	Copper Alloy
HPCSS	N/A	Screw Tail	1AWG	8 mm	1AWG	40 - 50 mm ²	180A	Silver	Copper Alloy
HP25DCS	HS25DCS	Crimp Barrel	4AWG	10 mm	4AWG	20 - 25 mm ²	120A	Silver	Copper Alloy
HP35DCS	HS35DCS	Crimp Barrel	2AWG	10 mm	2AWG	30 - 35 mm ²	130A	Silver	Copper Alloy
HP50DCS	HS50DCS	Crimp Barrel	1AWG	10 mm	1AWG	40 - 50 mm ²	180A	Silver	Copper Alloy
HP70DCS	HS70DCS	Crimp Barrel	2/0 AWG	10 mm	2/0 AWG	60 - 70 mm ²	250A	Silver	Copper Alloy
HP95DCS	HS95DCS	Crimp Barrel	3/0 AWG	10 mm	3/0 AWG	85 - 95 mm ²	300A	Silver	Copper Alloy
HPDHS	N/A	Flathole Tail	3/0 AWG	10 mm	3/0 AWG	85 - 95 mm ²	300A	Silver	Copper Alloy
HPDSS	N/A	Screw Tail	3/0 AWG	10 mm	3/0 AWG	85 - 95 mm ²	300A	Silver	Copper Alloy



em eco|mate® Plastic

Circular, Plastic Connectors Ideal for Industrial Applications



Available in 1 Shell Size and 4 Insert Arrangements

Amphenol Tuchel Industrial's **ecomate® Plastic Series** of connectors provide an IP65/67 rating (in mated condition) for industrial applications, and incorporates the latest technology in a sealed, high-impact, lightweight, thermoplastic design. ecomate® Plastic connectors feature a rapid threading coupling system for easy, reliable mating/unmating. Also available as **ecomate® Overmolded Cable Assemblies** with integrated uni-directional strain reliefs, highly-flexible cables Resistant to a wide range of chemical fluids, all while being UV and corrosion Resistant.

Key Features

- IP65 and IP67 rated (in mated condition)
- Rapid Threading Coupling System
- Contact Types: Screw (Field Install), Crimp, and Solder
- UL94-VO Flammability Rating



Potential Applications: Factory Automation, Industrial, Heavy Equipment, Heavy Duty, Transportation, Entertainment/Lighting, Welding, Special Machinery, Surveillance, Traffic Systems, HVAC, I/O Module

ecomate® Plastic - Specifications (Reference Individual Datasheets)

IP Rating	IP65 and IP67 (in mated condition)
Max. Current Amperage	Up to 22A @ 40°C
Max. Voltage Rating (AC/DC)	600V
Operating Temperature	-40°C to +125°C
Coupling System	Rapid Threading
Housing Body	Thermoplastic UL94-VO
Contact Types	Stamped & Formed, Machined, Solder
Contact Termination	Screw (Field Install), Crimp, Solder
Contact Material	Copper Alloy (Gold, Tin & Silver Plating are available)
Wire AWG Range	26 - 14AWG (0.14 - 2.5mm ²)
Sealing Material	Neoprene
Min. Mating Cycles	>500

Shielding	None
Flammability Rating	UL 94 V-0
Fluid Resistance	Gas, oil, mineral oil, acid bath, basic bath
Overvoltage Category	III
Strain Relief Clamp Range	6.0 - 12.5mm
Insulation Resistance	≥ 10 ⁸ Ω
Thermal Shock	No cracking, chipping or leaking after 20 test cycles from -55°C to 125°C
RoHS Compliant	RoHS ALL materials meet the requirements of the European Directive. (See website for documentation)
Approvals	VDE, SEV, UL, CSA

Shell Sizes & Insert Arrangements

(Front view of pin insert/rear view of socket insert shown for reference only)

Shell Size (30mmØ)	Shell Size (30mmØ)	Shell Size (30mmØ)	Shell Size (30mmØ)
3+PE Pos 4 x 1.6A 400V	6+PE Pos 7 x 1.2/1.3A 250V	3+PE Pos 4 x 1.4A 600V	6+PE Pos 7 x 1.4A 600V

Connector Configurations

Straight Plug Male	Straight Plug Female	90 Right Angle Plug Male	90 Right Angle Plug Female	Receptacle Male	Receptacle Female

Backshell Cable Diameters

Shell Size 30.0mmØ	6.0 - 12.05mm
--------------------	---------------



Standard products. Custom solutions
Customer Service +1 800 394 7732



em eco|mate® C16

Circular, Plastic Connectors Ideal for Rough, Environmental Applications



Available in 2 Shell Sizes and 11 Insert Arrangements

Amphenol Tuchel Industrial's **ecomate® C16 Series** of connectors provide an IP65 rating (in mated condition) for rough environmental conditions, and incorporates the latest technology in a sealed, robust, lightweight, thermoplastic design. ecomate® C16 connectors feature a circular bayonet coupling system for easy, reliable mating/unmating. Two types of connectors are available: Field-installable, screw termination, and a cost-effective, crimp version for machine processing.

Key Features

- IP65 rated (in mated condition)
- Contact Types: Screw (Field Install), and Crimp
- Circular Bayonet Coupling System
- UL94-VO Flammability Rating



Potential Applications: Factory Automation, Industrial, Heavy Equipment, Heavy Duty, Transportation, Entertainment/Lighting, Drives, Cooling and Heating Systems, Adhesive Coatings and Laminating Systems, Industrial Fans

ecomate® C16 - Specifications (Reference Individual Datasheets)

IP Rating	IP65 (in mated condition)
Max. Current Amperage	Up to 50A @ 40°C
Max. Voltage Rating (AC/DC)	900V
Operating Temperature	-40°C to +125°C
Coupling System	Circular Bayonet
Housing Body	Thermoplastic UL94-VO
Contact Types	Stamped & Formed
Contact Termination	Screw (Field Install), Crimp
Contact Material	Copper Alloy (Gold, Tin & Silver Plating are available)
Wire AWG Range	28 - 10AWG (0.09 - 6.0 mm ²)
Sealing Material	Neoprene
Min. Mating Cycles	>500

Shielding	None
Flammability Rating	UL 94 V-0
Fluid Resistance	Gas, oil, mineral oil, acid bath, basic bath
Overvoltage Category	III
Strain Relief Clamp Range	8.0 - 21.0mm
Insulation Resistance	≥ 10 ⁸ Ω
Thermal Shock	No cracking, chipping or leaking after 20 test cycles from -55°C to 125°C
RoHS Compliant	RoHS ALL materials meet the requirements of the European Directive. (See website for documentation)
Approvals	VDE, UL and CSA

ecomate® C-16 - Connector Configurations

C-16-3							C-16-L	
Straight Plug Male	Straight Plug Female	90 Right Angle Plug Male	90 Right Angle Plug Female	Flange Receptacle w Mounted Gasket Male	Flange Receptacle w Mounted Gasket Female	Panel Mount Receptacle w Ring Nut Female	Straight Plug Female	Receptacle Male



Standard products. Custom solutions
Customer Service +1 800 394 7732

ecomate® C16-3 - Shell Sizes & Insert Arrangements
(Front view of pin insert/rear view of socket insert shown for reference only)

Shell Size 1					
2+PE Pos 3 x 36A 750V	3+PE Pos 4 x 23A 900V	8+PE Pos 9 x 12A 400V	12+3+PE Pos MIX 4 x 12A, 12 x 6A 4 x 320V, 12 x 24V	14+PE (11+4) Pos MIX 4 x 16A, 11 x 6A 100V	17+PE Pos 18 x 6A 100V

Backshell Cable Diameters

Shell Size 1	8.0 - 14.0mm
Shell Size 2	10.0 - 21.0mm

Shell Size 2			
5+PE Pos 6 x 21A 400V	12+PE Pos MIX 9 x 11A, 4 x 21A 9 x 300V, 4 x 500V	14+PE Pos MIX 4 x 6A, 11 x 12A 400V	19+PE Pos MIX 20 x 6A 250V

ecomate® C16-L - Shell Sizes & Insert Arrangements
(Front view of pin insert/rear view of socket insert shown for reference only)

Shell Size 2
4+PE Pos 5 x 50A 600V