



VISHAY INTERTECHNOLOGY, INC.



SUPER 12

FEATURED PRODUCTS




2017



www.vishay.com/ref/2017s12




Table of Contents



SQJQ480E

TrenchFET® Gen IV MOSFET


01



T59 Series

vPolyTan™ Polymer Capacitors


02



VCNL4035X01

Optical Sensor

03



WSLF2512

6 W Power Metal Strip® Resistor

04



VTVS5V0ASM to VTVS63GSMF

400 W Transient Voltage Suppressor Diodes

05




IHLE-5A Series

High Current Inductors with E-Field Shield

06





SiC462

Synchronous microBUCK[®] Regulator

07



MKP1847H

AC Filtering Film Capacitor

08



10 A to 30 A FRED Pt[®]

Ultrafast Rectifiers in SMPD Package


09



IHXL Series

Very High Current Inductors

10



SiRA20DP

TrenchFET[®] Gen IV MOSFET

11




DCRF

Direct Water-Cooled Power Wirewound Resistor

12





SQJQ480E

TrenchFET® Gen IV MOSFET

80 V, 3 m Ω N-Channel MOSFET in
PowerPAK® 8x8L Package

01




FEATURES

- TrenchFET® power MOSFET
- AEC-Q101 qualified
- 100 % R_g and UIS tested
- Fully lead (Pb)-free device
- Low profile height: 1.9 mm
- PowerPAK® SO-8 and PowerPAK® 8x8L packages achieve the best R_{DS}, Q_g, and Q_{OSS} by minimizing the package resistance and parasitic resistance

APPLICATIONS / MARKET SEGMENTS

- Automotive
- Transportation / intralogistics



T59 Series

vPolyTan™ Polymer Capacitors

Low ESR, High Energy Polymer
Capacitors in MAP Package

02




FEATURES

- Wide capacitance range: 15 μF to 470 μF
- Voltage ratings up to 75 V
- Ultra low ESR down to 25 m Ω
- Patented MAP packaging offers 25 % improvement in volumetric efficiency to yield the industry's highest capacitance density
- Low ESR: multi-anode construction reduces ESR by 50 %
- L-terminations reduce equivalent series inductance (ESL) by 33 % while improving the electrical and mechanical connection to the PCB

APPLICATIONS / MARKET SEGMENTS

- Bulk energy storage in solid-state drives
- Filtering and voltage holdup in power conversion applications

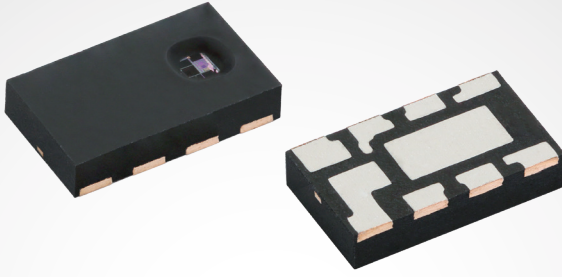

VCNL4035X01

Optical Sensor

Integrated Proximity and Ambient Light
Sensor for Gesture Applications

03




FEATURES

- AEC-Q101 qualified
- 16-bit resolution for ambient light and proximity sensors
- Integrated current driver with internal logic to drive up to three IREDS for gesture recognition
- Excellent background light cancellation
- Outstanding sensitivity allowing high object detection distance
- Low profile package: 0.75 mm

APPLICATIONS / MARKET SEGMENTS

- Displays
 - Wake-up and touch screen locking
 - Backlight and contrast control
- Gesture recognition with two or three external emitters to detect swipe gestures

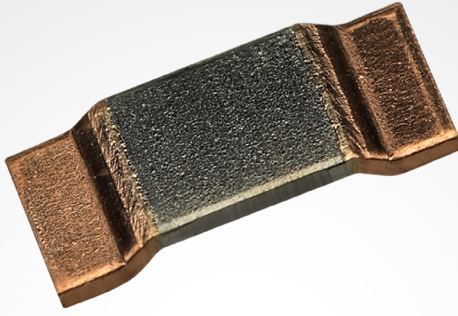

WSLF2512

6 W Power Metal Strip® Resistor with
Low Resistance and Low TCR

04




FEATURES

- High power rating up to 6 W
- Low resistance values down to 0.0003 Ω
- TCR down to 70 ppm/°C
- Small case for power rating: 2512

APPLICATIONS / MARKET SEGMENTS

- Current sensing, voltage division, and pulse applications in power management for:
 - Automotive electronic controls (engine, transmission, anti-lock brakes, audio, and climate controls)
 - Inverter controls for down-hole test and measurement equipment
 - Inverter controls for HVAC systems
 - VRMs for servers
 - Current sensing in power semiconductor modules

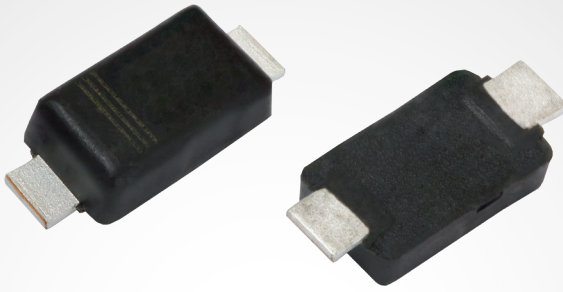

VTVS5V0ASMF to VTVS63GSMF

400 W Transient Voltage Suppressor
(TVS) Diodes in SMF Package

05




FEATURES

- 400 W peak pulse power capability with 10/1000 μ s waveform
- 2 % tolerance of avalanche breakdown voltage
- Low profile SMF package (1 mm height)
- Low clamping ratio
- High surge current
- Wave and reflow solderable
- Operating temperature: -55 °C to +175 °C

APPLICATIONS / MARKET SEGMENTS

- Line transient voltage protection in space-constrained electronics such as laptops, notebooks, tablets, external hard drives, and more

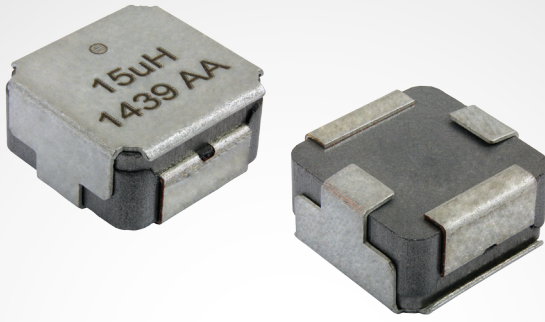

IHLE-5A Series High Current Inductors with E-Field Shield

Provide 20 dB Electric Field Reduction
at 1 cm for Automotive Applications

06




FEATURES

- Integrates e-field shield into an IHLP® inductor package
- Reduces e-field up to 20 dB at 1 cm
- High efficiency with typical DCR from 1.55 mΩ to 167 mΩ
- Wide range of inductance values from 0.22 μH to 47 μH
- Available in three case sizes: 2525, 3232, and 4040
- Rated currents to 36 A and handle high transient current spikes without saturation
- Available in any standard IHLP inductance value
- Automotive Grade and AEC-Q200 qualified

APPLICATIONS / MARKET SEGMENTS

- DC/DC converter circuits near noise-sensitive components
- Automotive control circuitry
- Computer and other high current, noisy power supplies

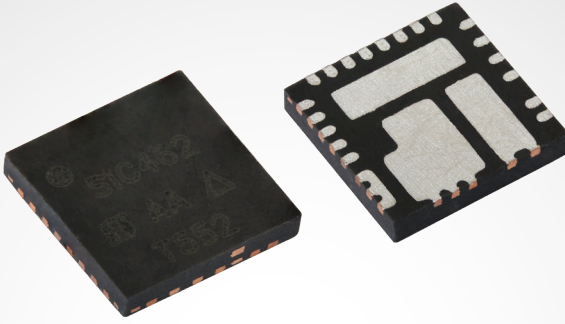

SiC462

Synchronous microBUCK[®] Regulator

4.5 V to 60 V Buck Regulator Capable of Delivering Up to 75 W Output Power

07



FEATURES

- Scalable solution for 3 A, 6 A, and 10 A
- Stable with any output capacitor
- 100 kHz to 1.5 MHz operating frequency
- Low quiescent current – 250 μ A, low shutdown current
- Single supply operation down to 5 V with internal linear regulator
- Protection and monitoring: OVP, OCP, UVP, OTP, UVLO, power good
- Operating ambient temperature: -40 °C to 105 °C

APPLICATIONS / MARKET SEGMENTS

- Industrial and automation
- Industrial computing
- Base station power supplies
- Wall transformer regulation
- Robotics
- Drones
- Battery management systems
- Power tools
- Vending, ATM, and slot machines



MKP1847H

AC Filtering Film Capacitor

Robust Design for High Humidity
Environments

08




FEATURES

- 85 °C, 85 % relative humidity, 1000 h at rated UNAC
- Rated voltages: 250 VAC, 310 VAC, 350 VAC, and 480 VAC
- Rated capacitance range: 1 μ F to 35 μ F
- Segmented film
- UL 810 (electrical pending)

APPLICATIONS / MARKET SEGMENTS

- Outdoor applications
 - Inverters and converters
- High power supplies and large drives
- UPS
- Renewable energy
- Welding equipment
- AC harmonic filters

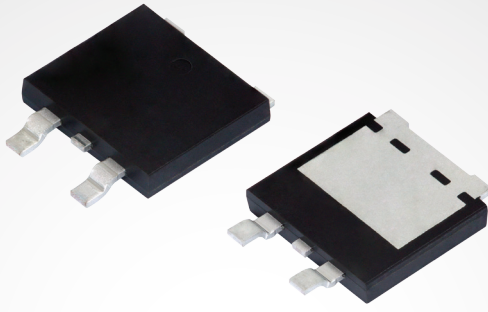

10 A to 30 A FRED Pt[®]

Ultrafast Rectifiers in SMPD Package

Offer Higher Power Density

09




FEATURES

- High operating temperature up to 175 °C
- Low forward voltage drop down to 0.75 V typical with fast recovery time down to 25 ns
- Soft recovery behavior over a temperature range of -40 °C up to 175 °C
- Low profile (< 1.7 mm height) SMPD (TO-263AC) package is footprint-compatible to TO-263 (D2PAK) package
- Available in AEC-Q101 qualified and standard versions

APPLICATIONS / MARKET SEGMENTS

- Automotive
 - EV / HEV battery charging systems
 - Power supply PFC
- Industrial
 - APD in inverters for motor drives, UPS, and LED and HID lighting systems

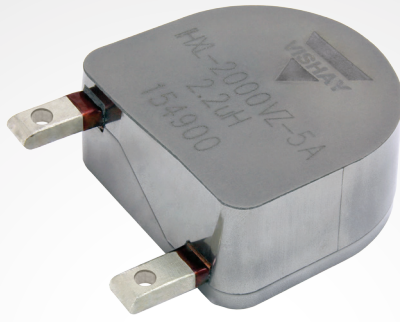

IHL Series

Very High Current Inductors

Largest Composite Inductor Available;
Up to 250 A Continuous Current Rating

10




FEATURES

- Very high current operation: up to 250 A
- Soft saturation: 20 % saturation at 150 % of rated current
- Continuous operation at 155 °C
- Very low DCR: $\leq 0.2 \text{ m}\Omega$
- AEC-Q200 qualified

APPLICATIONS / MARKET SEGMENTS

- Automotive
 - Input filter for 48 V DC/DC converters
 - EMI filter for power steering

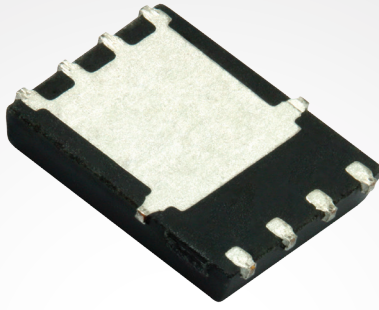

SiRA20DP

TrenchFET® Gen IV MOSFET

25 V, 0.58 mΩ N-Channel MOSFET

Provides Lowest Maximum $R_{DS(on)}$

11




FEATURES

- Provides the lowest maximum $R_{DS(on)}$ rating at $V_{GS} = 10\text{ V}$
- Increases power density as the $R_{DS(on)}$ cuts conduction power loss
- Provides the lowest Q_g for devices with maximum $R_{DS(on)} < 0.6\text{ m}\Omega$
- Low Q_g enables high efficiency for DC/DC conversion
- Available in the PowerPAK® SO-8 package

APPLICATIONS / MARKET SEGMENTS

- OR-ing
- Battery management and load switching
- Synchronous rectification
- Synchronous buck

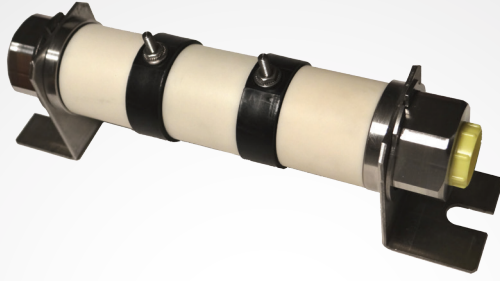

DCRF (Direct Water-Cooled Power Wirewound Resistor)

Handles Almost 10x the Power of
Naturally-Cooled Resistors in the Same Size

12



FEATURES


- Very high power dissipation up to 9000 W
- High overload capacity (2x nominal power for 60 s)
- Customization upon request
- Compact modular design
- Easy to mount and connect

APPLICATIONS / MARKET SEGMENTS

- High power snubber resistor for large drives and HVDC
- Filter resistor for large drives
- Fast discharge for battery banks (solar)



VISHAY INTERTECHNOLOGY, INC.

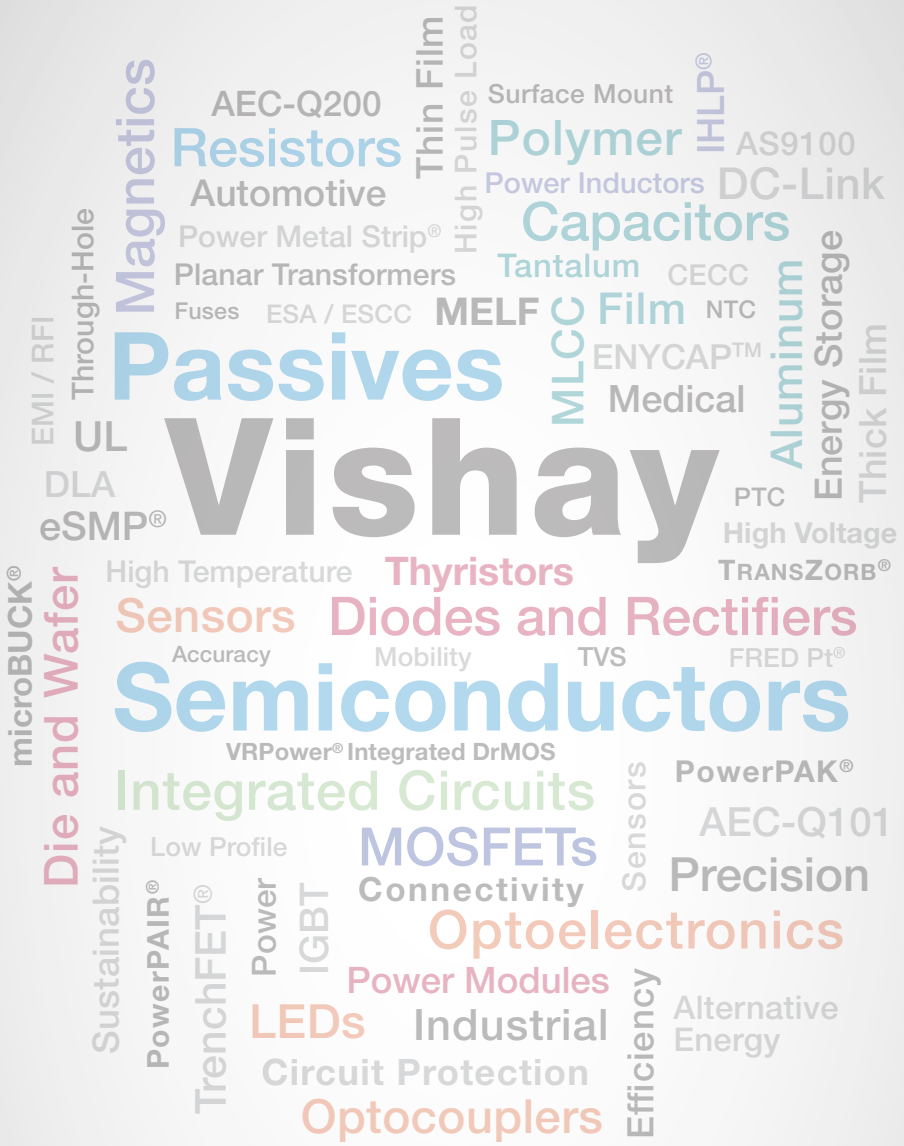

This document is subject to change without notice. The products described herein and this document are subject to specific disclaimers, set forth at www.vishay.com/doc?91000

A **WORLD OF** SOLUTIONS